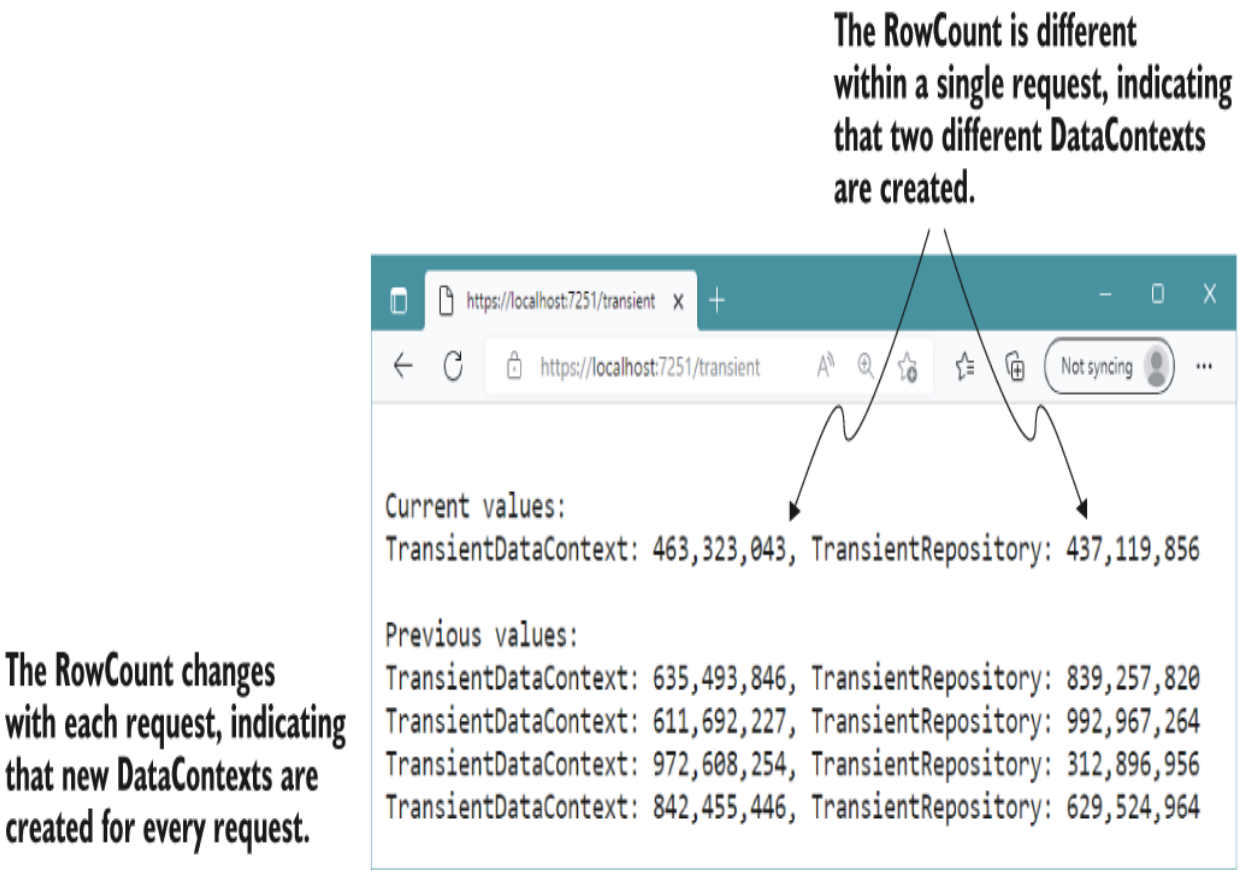


Figure 9.7 When registered using the transient lifetime, all `DataContext` objects are different, as you see by the fact that all the values are different within and between requests.

Transient lifetimes can result in the creation of a lot of objects, so they make the most sense for lightweight services with little or no state. Using the transient lifetime is equivalent to calling `new` every time you need a new object, so bear that in mind when using it. You probably won't use the transient lifetime often; the majority of your services will probably be scoped instead.

9.4.2 Scoped: Let's stick together