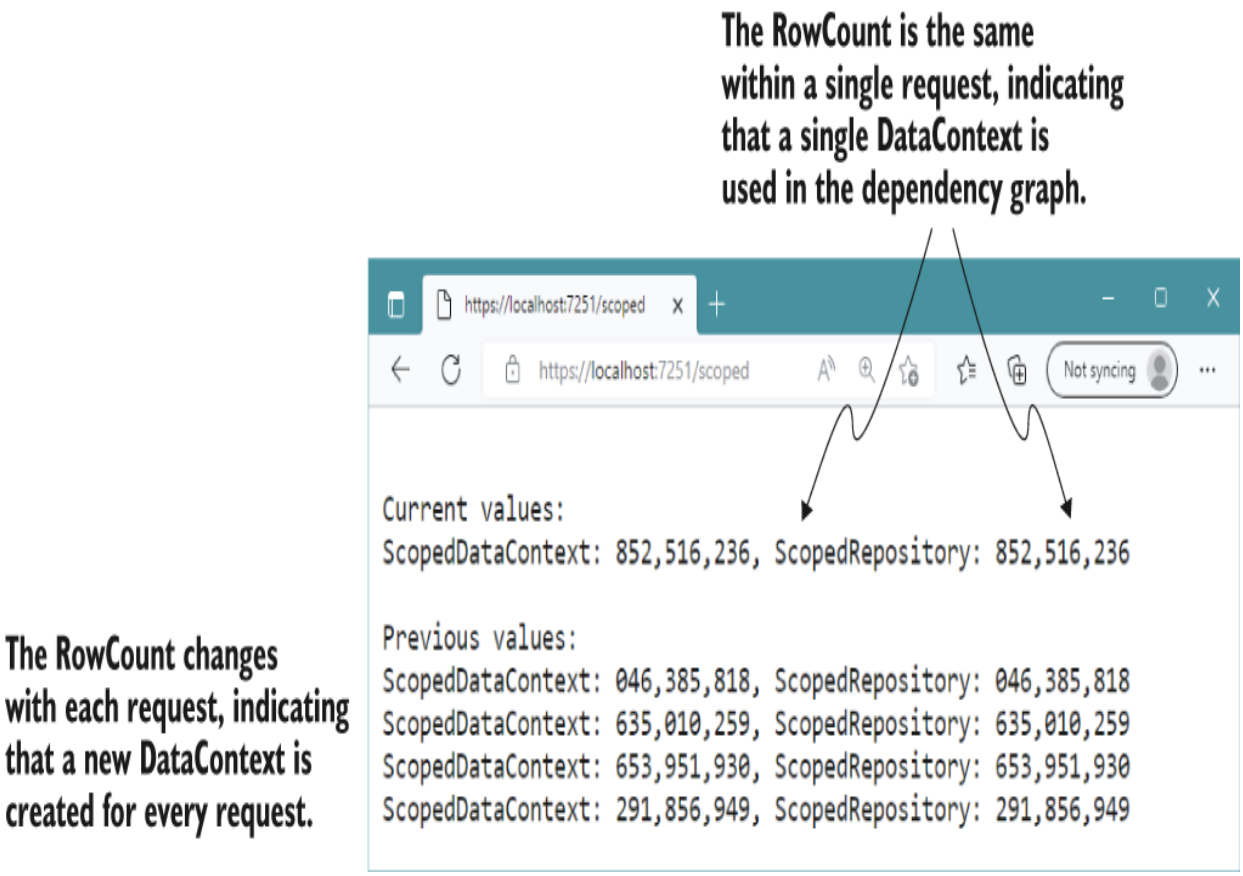


Figure 9.8 Scoped dependencies use the same instance of `DataContext` within a single request but a new instance for a separate request. Consequently, the `RowCounts` are identical within a request.

You can register dependencies as scoped by using the `AddScoped` extension methods. In this example, I registered `DataContext` as scoped and left `Repository` as transient, but you'd get the same results in this case if both were scoped:

```
builder.Services.AddScoped<DataContext>();
```

Due to the nature of web requests, you'll often find services registered as scoped dependencies in ASP.NET Core. Database contexts and authentication services are common examples of services that should be