`DataContext` is created for each scope but the instance inside `Repository` hangs around for the lifetime of the app.

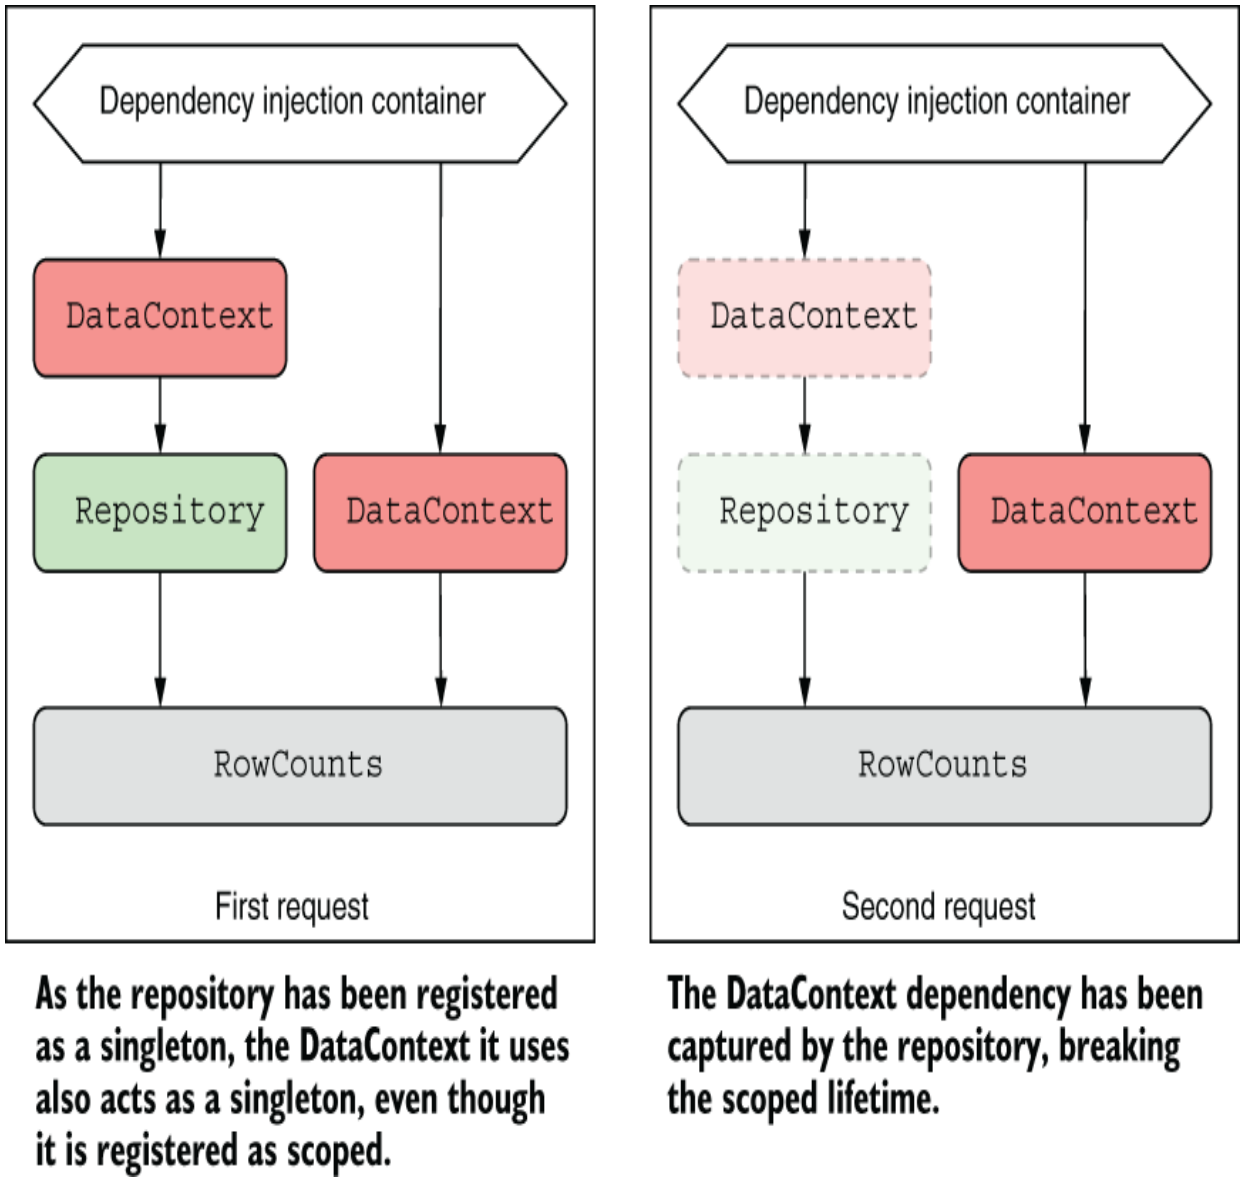


Figure 9.10 `DataContext` is registered as a scoped dependency, but `Repository` is a singleton. Even though you expect a new `DataContext` for every request, `Repository` captures the injected `DataContext` and causes it to be reused for the lifetime of the app.