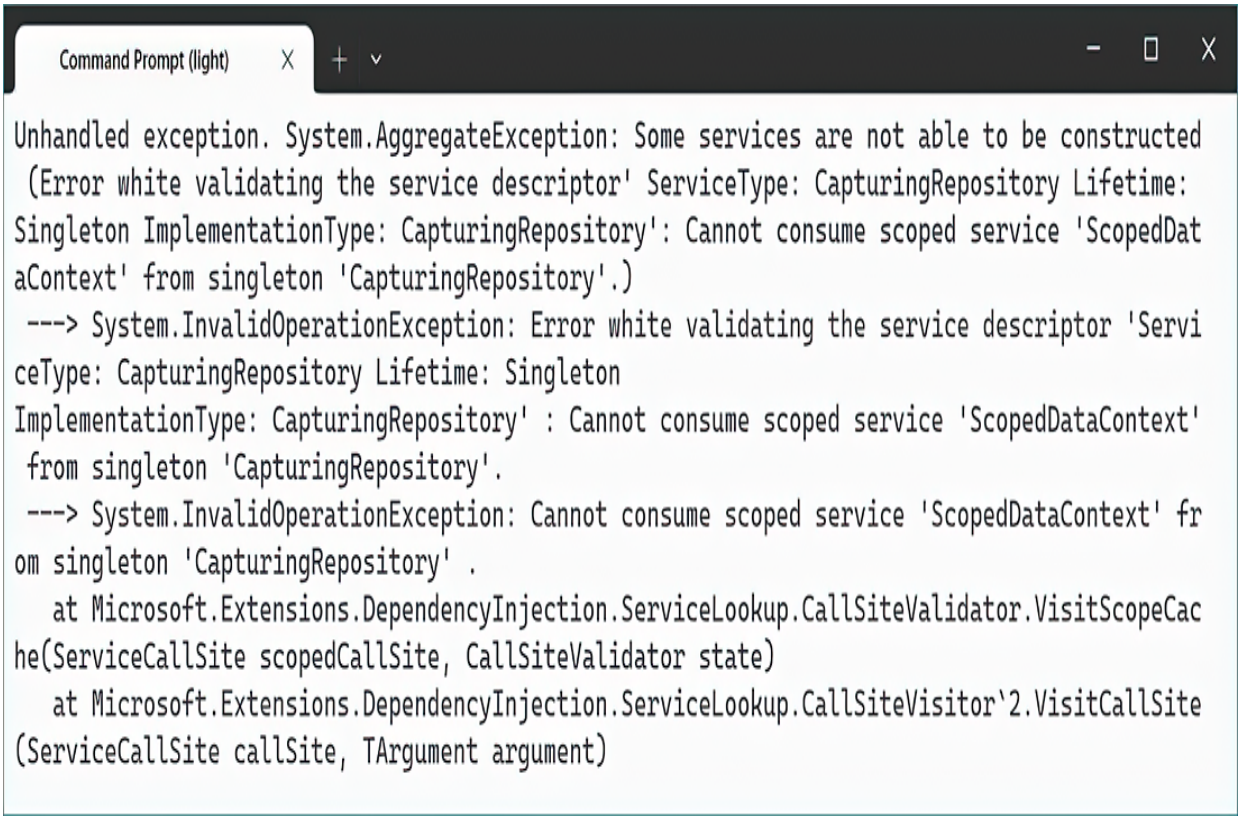


Figure 9.12 When `ValidateOnBuild` is enabled, the DI container checks on app startup that it can create all the registered services. If it finds a service it can't create, it throws an exception. By default, this check is enabled only for development environments.

WARNING Unfortunately, the container can't catch everything. For a list of caveats and exceptions, see this post from my blog: http://mng.bz/QmwG.

We've almost covered everything about dependency injection now, and there's only one more thing to consider: how to resolve scoped services on app startup in Program.cs.

9.5 Resolving scoped services outside a request