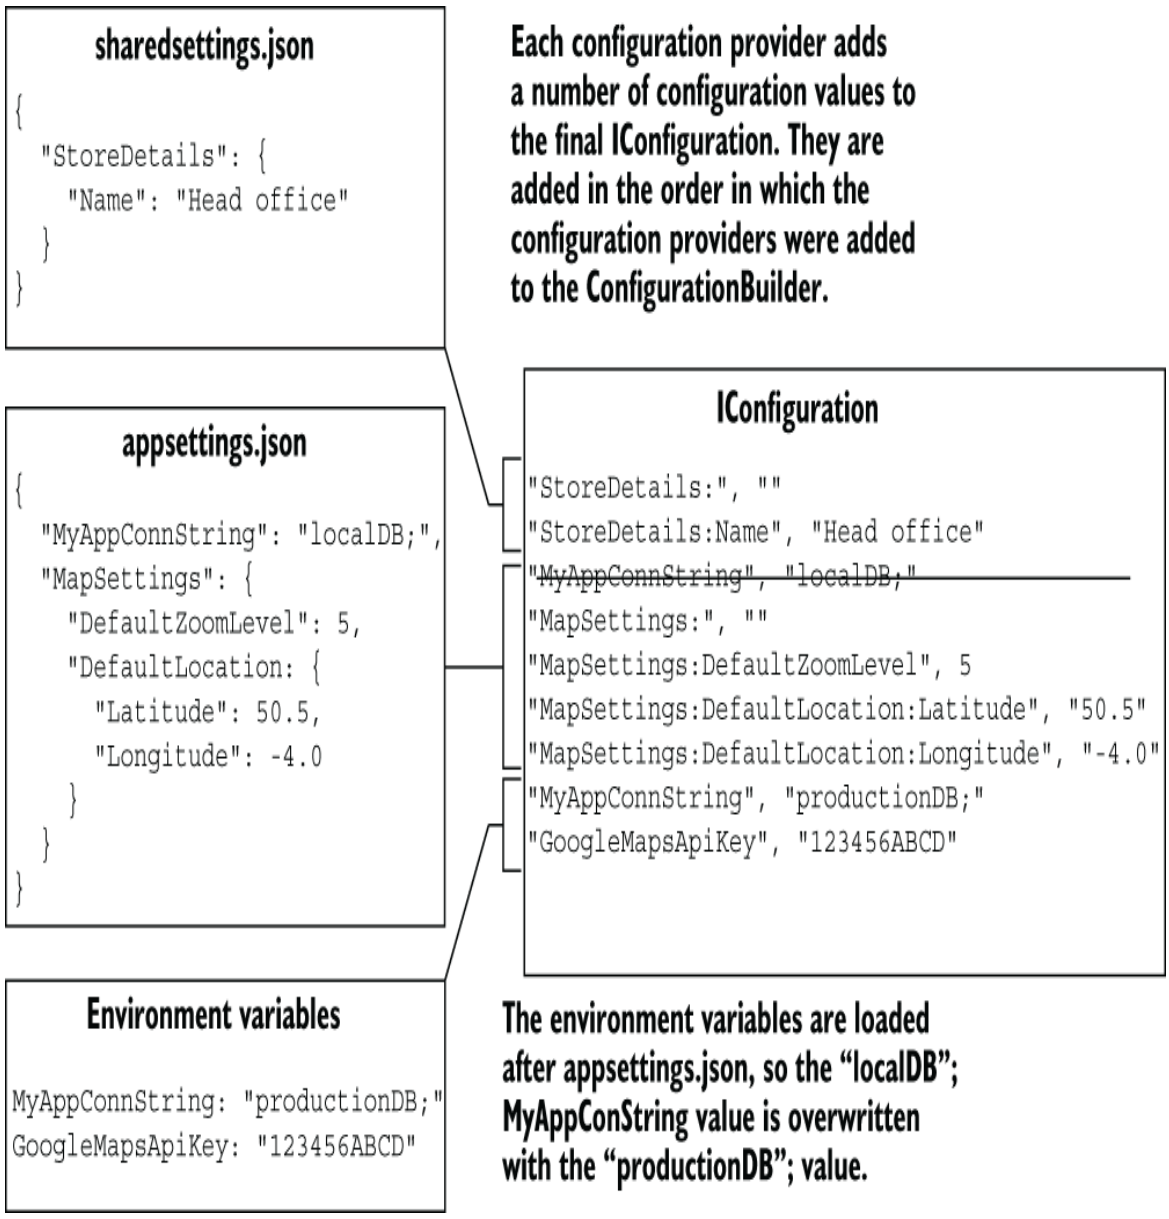


Figure 10.4 The final `IConfiguration` includes the values from each of the providers. Both appsettings.json and the environment variables include the `MyAppConnString` key. As the environment variables are added later, that configuration value is used.

Most of the settings in each provider are unique and are added to the final `IConfiguration`. But the `"MyAppConnString"` key appears both in appsettings.json and as an environment variable. Because the environment