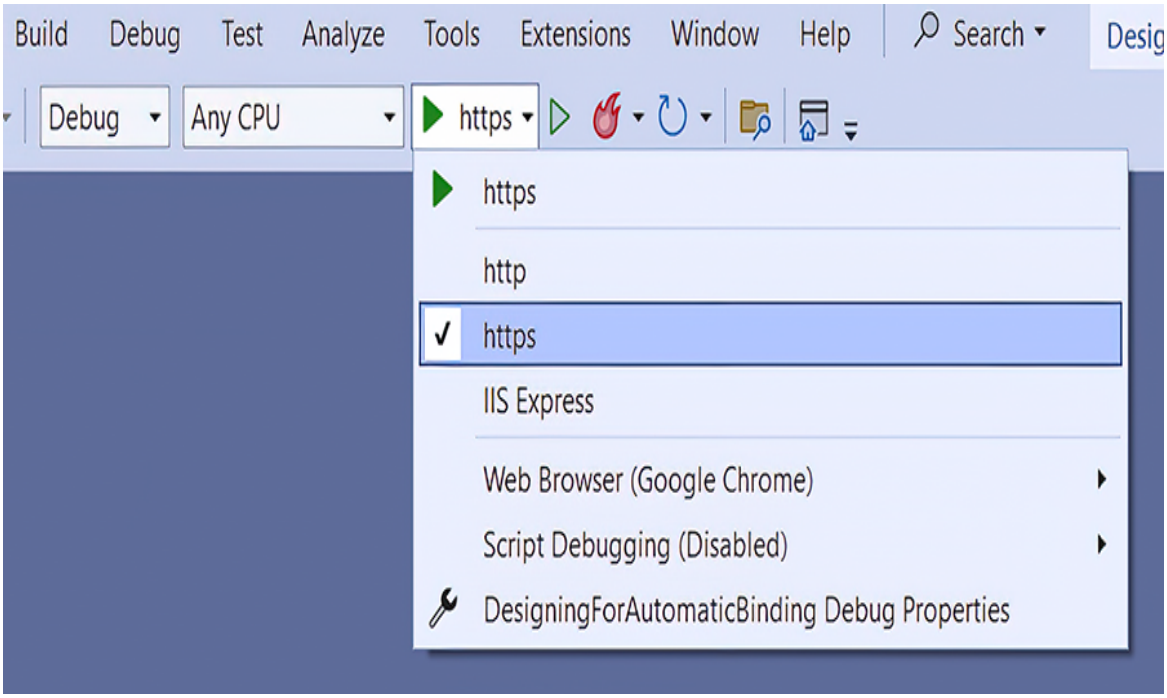


Figure 10.7 You can select the profile to use from Visual Studio by choosing it from the Debug drop-down menu. Visual Studio defaults to using the `https` profile.

If you're using Visual Studio, you can edit the launchSettings.json file visually: double-click the Properties node, choose the **Debug** tab, and choose **Open debug launch profiles UI**. You can see in figure 10.8 that the `ASPNETCORE_ENVIRONMENT` is set to Development; any changes made on this tab are mirrored in launchSettings.json.