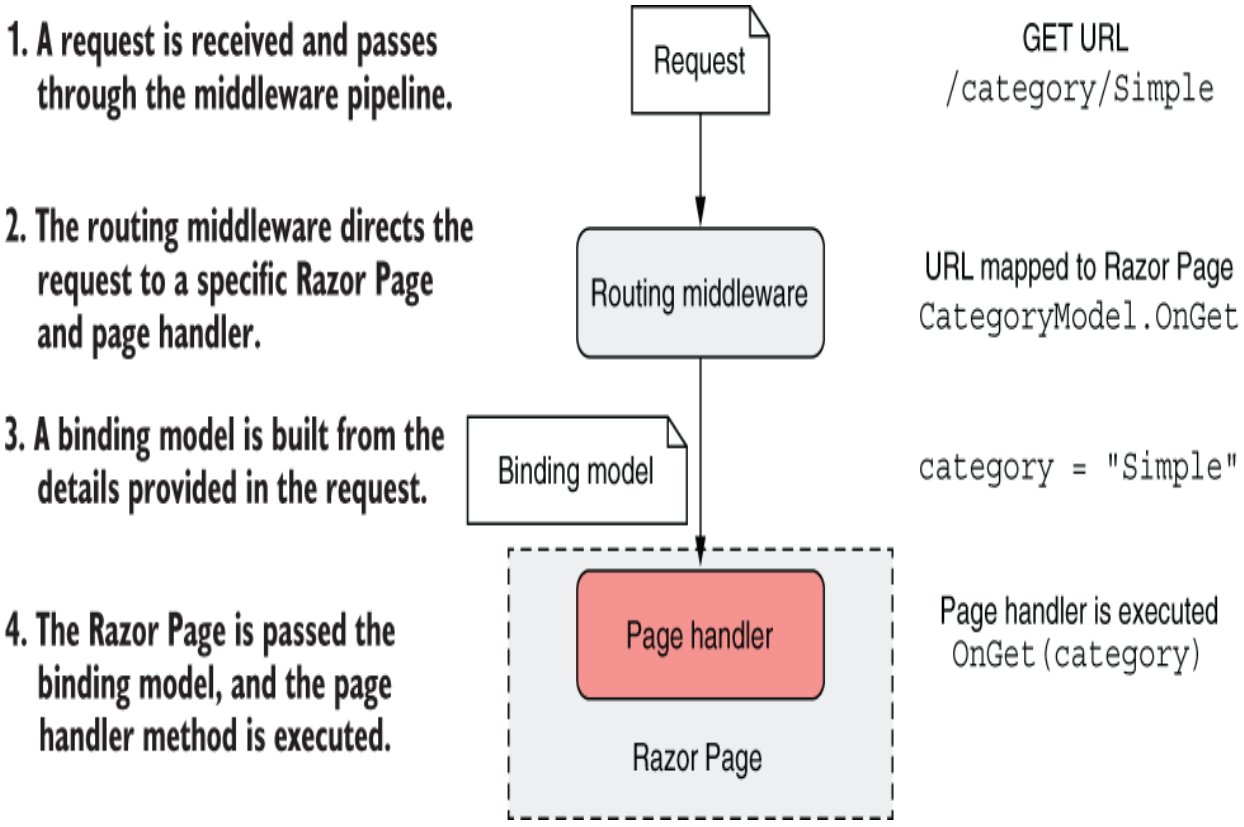


Figure 13.9 Routing a request to a Razor Page and building a binding model. A request to the `/category/Simple` URL results in the execution of the `CategoryModel.OnGet` page handler, passing in a populated binding model, `category`.

DEFINITION A *binding model* is one or more objects that act as a container for the data provided in a request—data that's required by a page handler.

In this case, the binding model is a simple string, `category`, that's bound to the `"Simple"` value. This value is provided in the request URL's path. A more complex binding model could have been used, with multiple properties populated with values from the route template, the query string, and the request body.