1. The page handler uses the category provided in the binding model to determine which method to invoke in the application model.
2. The page handler method calls into services that make up the application model. This might use the domain model to determine whether to include completed ToDo items, for example.
3. The services load the details of the ToDo items from the database and return them to the action method.

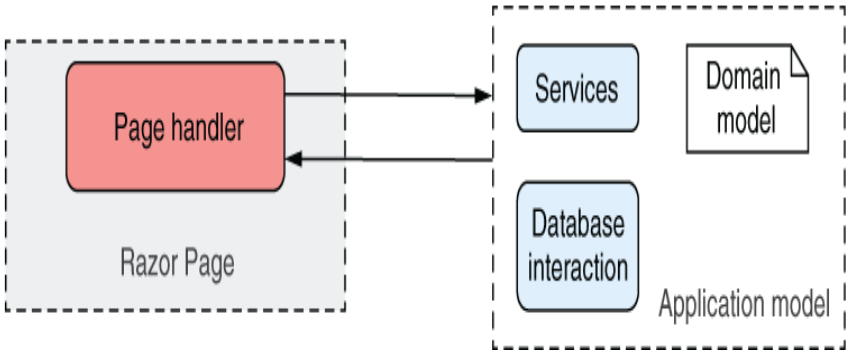


Figure 13.10 When executed, an action invokes the appropriate methods in the application model.

DEFINITION The *domain model* encapsulates complex business logic in a series of classes that don't depend on any infrastructure and are easy to test.

The page handler typically calls into a single point in the application model. In our example of viewing a to-do list category, the application model might use a variety of services to check whether the current user is allowed to view certain items, to search for items in the given category, to load the details from the database, or to load a picture associated with an item from a file. Assuming that the request is valid, the application model returns the required details to the page handler. Then it's up to the page handler to choose a response to generate.

13.4.3 Building HTML using the view model