The `handler` route value typically comes from a query string value in the request URL, such as `/Search?handler=CustomSearch`. If you don't like the look of query strings (I don't!), you can include the `{handler}` route parameter in your Razor Page's route template. For the Search page model in listing 15.2, you could update the page's directive to

```
@page "{handler?}"
```

This would give a complete route template something like `"Search/{handler?}"`, which would match URLs such as `/Search` and `/Search/CustomSearch`.

The `EndpointMiddleware` uses the `handler` route value and the HTTP verb together with a standard naming convention to identify which page handler to execute, as shown in figure 15.2. The `handler` parameter is optional and is typically provided as part of the request's query string or as a route parameter, as described earlier. The async suffix is also optional and is often used when the handler uses asynchronous programming constructs such as `Task` or `async`/`await`.

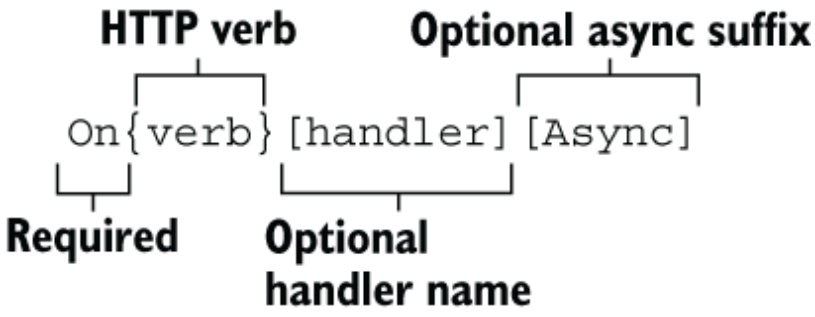

Figure 15.2 Razor Page handlers are matched to a request based on the HTTP verb and the optional handler parameter.