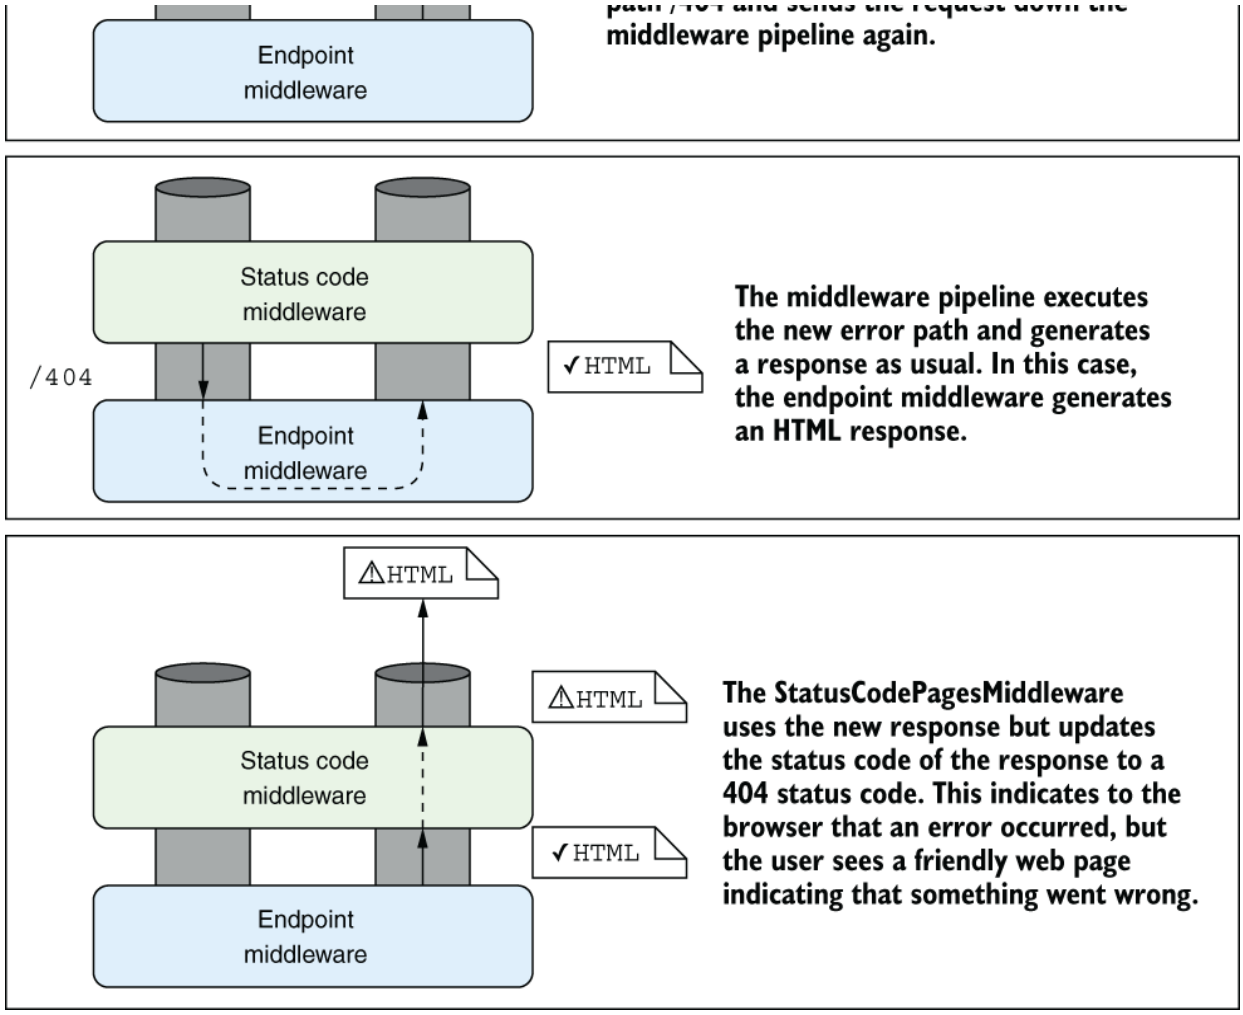


Figure 15.6 `StatusCodePagesMiddleware` reexecuting the pipeline to generate an HTML body for a `404` response. A request to the `/` path returns a `404` response, which is handled by the status code middleware. The pipeline is reexecuted using the `/404` path to generate the HTML response.

Note that the error handling path `"/{0}"` contains a format string token, `{0}`. When the path is reexecuted, the middleware replaces this token with the status code number. For example, a `404` error would reexecute the `/404` path. The handler for the path (typically a Razor Page, but it can be any endpoint) has access to the status code and can optionally tailor the