response, depending on the status code. You can choose any error handling path as long as your application knows how to handle it.

With this approach in place, you can create different error pages for different error codes, such as the `404`-specific error page shown in figure 15.7. This technique ensures that your error pages are consistent with the rest of your application, including any dynamically generated content, while also allowing you to tailor the message for common errors.

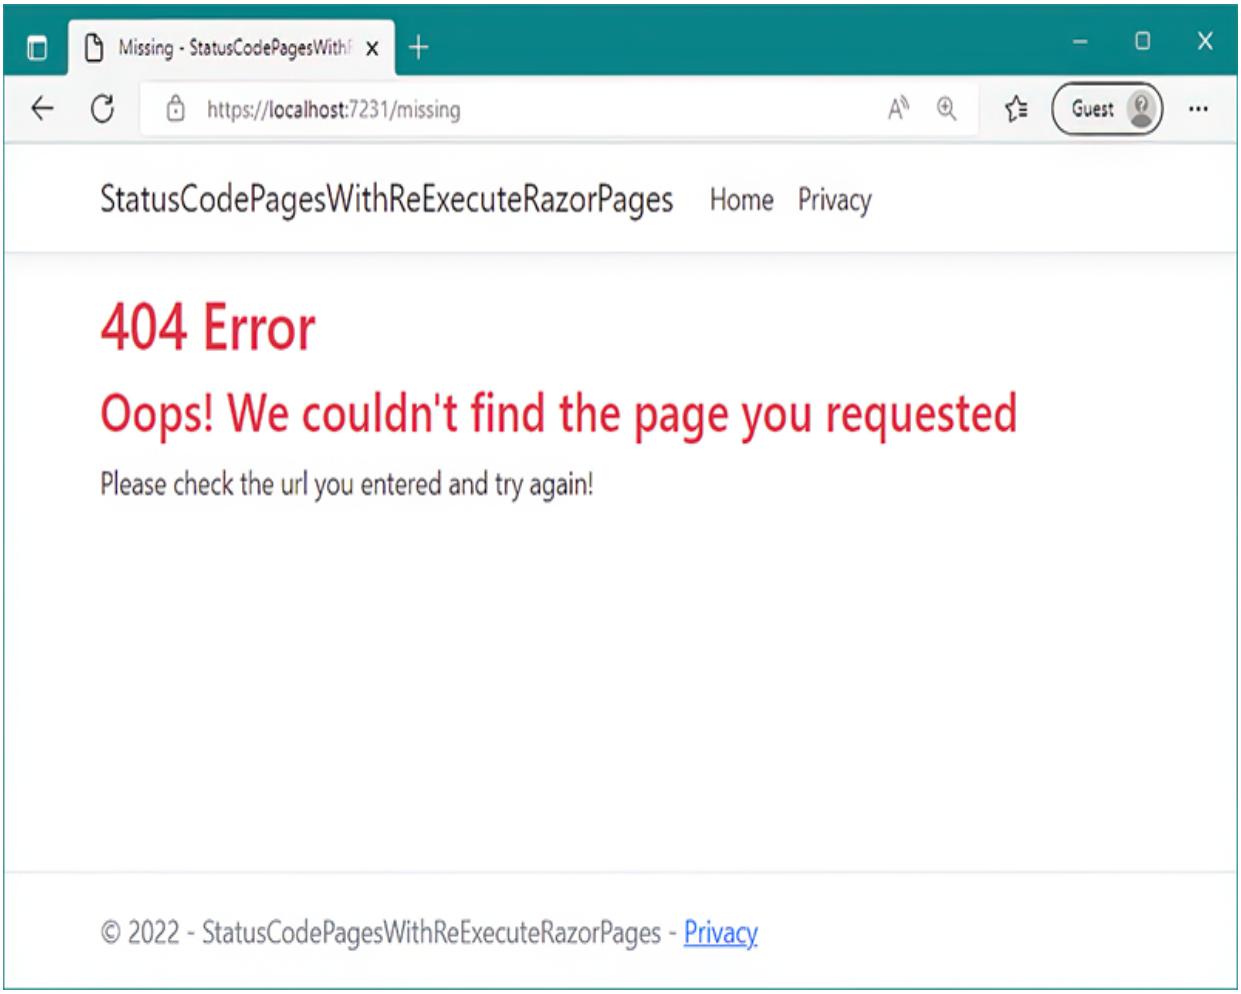


Figure 15.7 An error status code page for a missing file. When an error code is detected (in this case, a `404` error), the middleware pipeline is