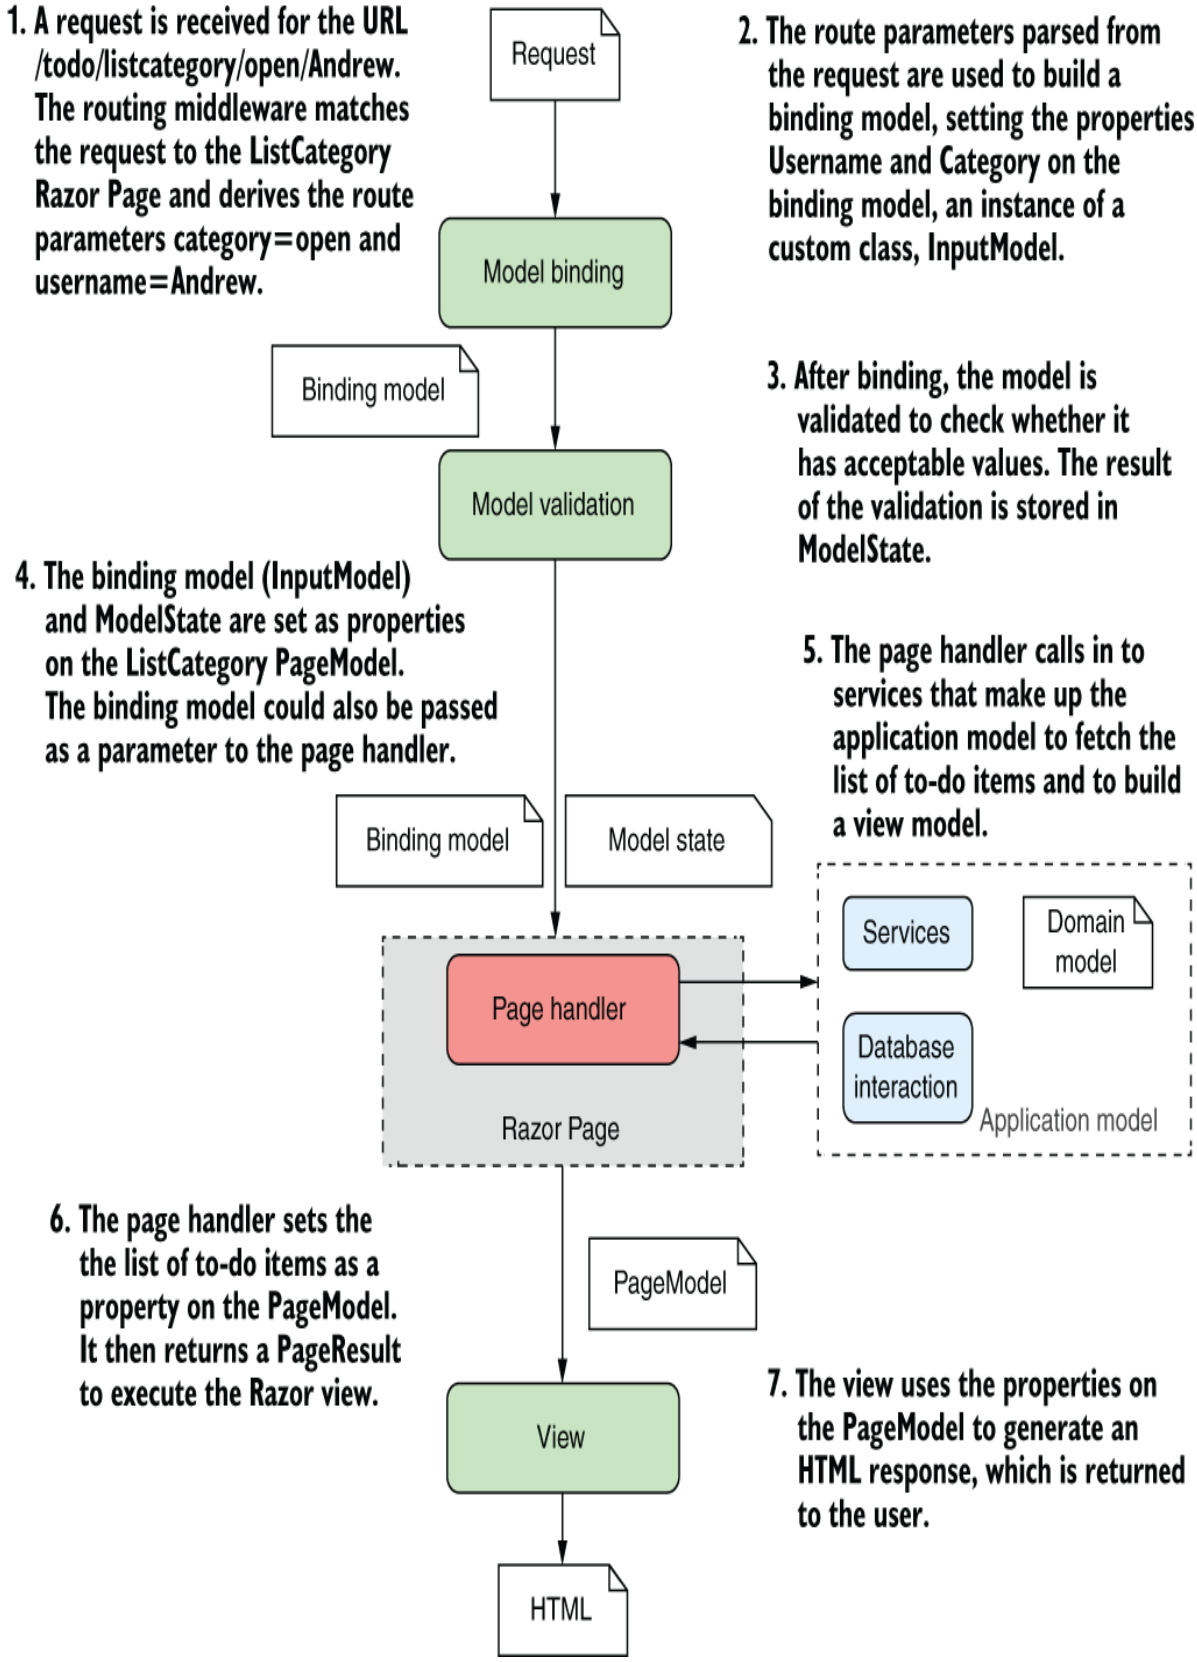

1. A request is received for the URL /todo/listcategory/open/Andrew. The routing middleware matches the request to the ListCategory Razor Page and derives the route parameters category=open and username=Andrew.
Request
Model binding
2. The route parameters parsed from the request are used to build a binding model, setting the properties Username and Category on the binding model, an instance of a custom class, InputModel.
Binding model
3. After binding, the model is validated to check whether it has acceptable values. The result of the validation is stored in ModelState.
Model validation
4. The binding model (InputModel) and ModelState are set as properties on the ListCategory PageModel. The binding model could also be passed as a parameter to the page handler.
5. The page handler calls in to services that make up the application model to fetch the list of to-do items and to build a view model.
Binding model
Model state
Services
Domain model
Page handler
Database interaction
Application model
Razor Page
6. The page handler sets the the list of to-do items as a property on the PageModel. It then returns a PageResult to execute the Razor view.
PageModel
View
7. The view uses the properties on the PageModel to generate an HTML response, which is returned to the user.
HTML