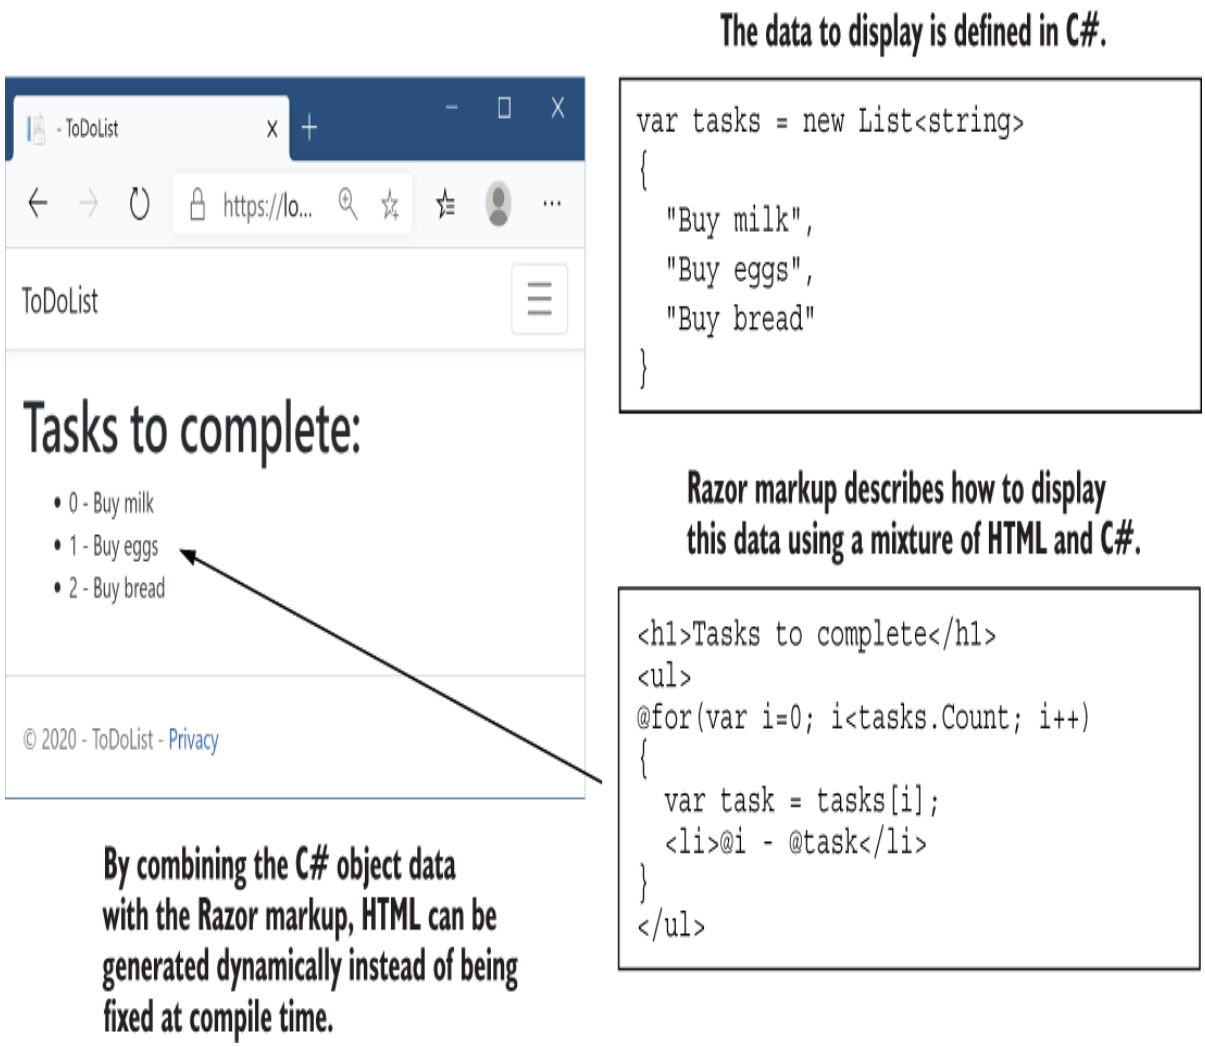


Figure 17.3 Razor templates can be used to generate the HTML dynamically at runtime from C# objects. In this case, a `for` loop is used to create repetitive HTML `<li>` elements.

In this example, I hardcoded the list values for simplicity; no dynamic data was provided. This is often the case on simple Razor Pages, like those you might have on your home page; you need to display an almost static page. For the rest of your application, it will be far more common to have some sort of data you need to display, typically exposed as properties on your `PageModel`.

17.2.3 Passing data to views