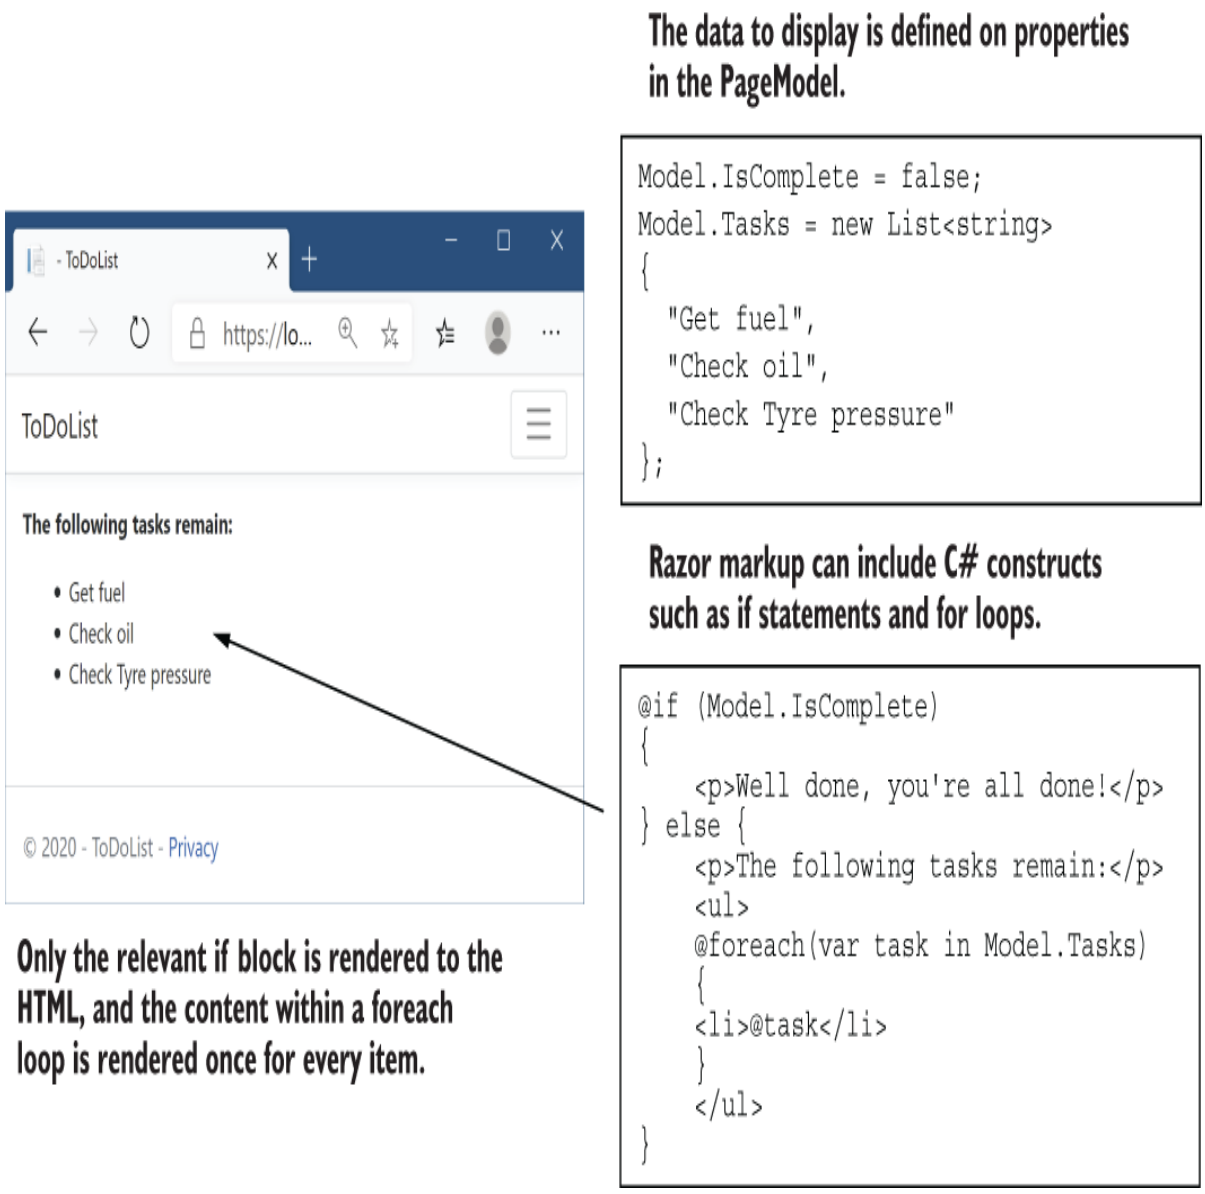


Figure 17.6 The Razor template generates a `<li>` item for each remaining task, depending on the data passed to the view at runtime. You can use an `if` block to render completely different HTML depending on the values in your model.

IntelliSense and tooling support