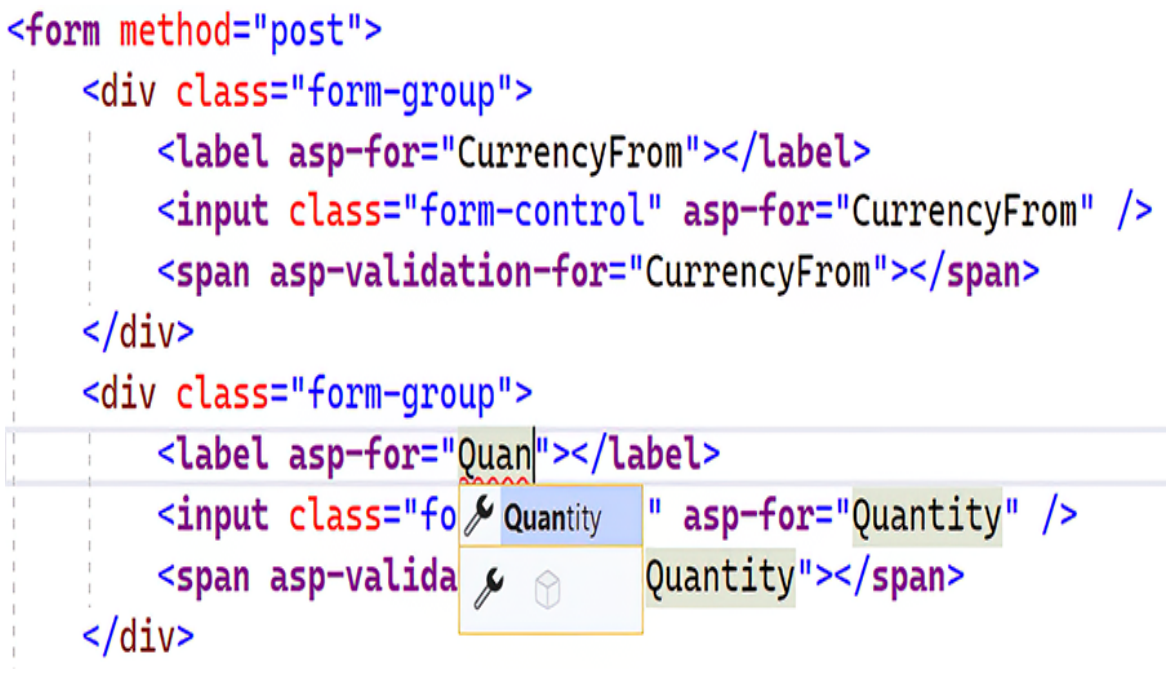


Figure 18.2 In Visual Studio, Tag Helpers are distinguishable from normal elements by being bold and a different color from standard HTML elements and attributes.

Tag Helpers are extra attributes on standard HTML elements (or new elements entirely) that work by modifying the HTML element they're attached to. They let you easily integrate your server-side values, such as those exposed on your `PageModel`, with the generated HTML.

Notice that listing 18.1 doesn't specify the captions to display in the labels. Instead, you declaratively use `asp-for="CurrencyFrom"` to say "For this `<label>`, use the `CurrencyFrom` property to work out what caption to use." Similarly, for the `<input>` elements, Tag Helpers are used to

- Automatically populate the value from the `PageModel` property.
- Choose the correct `id` and `name`, so that when the form is `POST`ed back to the Razor Page, the property model-binds correctly.