- Choose the correct input type to display (for example, a `number` input for the `Quantity` property).
- Display any validation errors, as shown in figure 18.3.

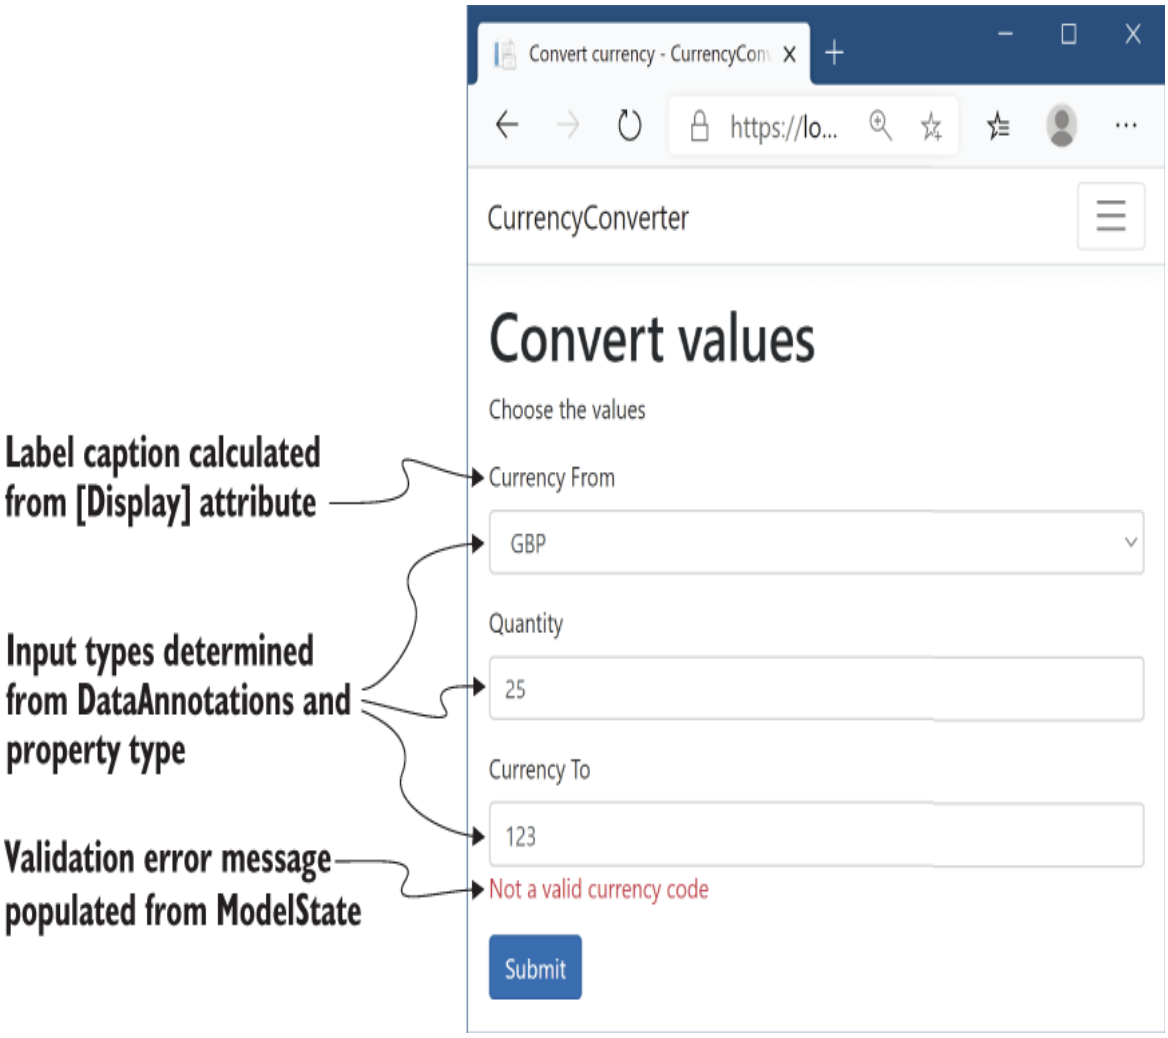


Figure 18.3 Tag Helpers hook into the metadata provided by `DataAnnotations` attributes, as well as the property types themselves. The Validation Tag Helper can even populate error messages based on the `ModelState`, as you saw in chapter 16.

Tag Helpers can perform a variety of functions by modifying the HTML elements they're applied to. This chapter introduces several common Tag Helpers and how