Without the Validation Summary Tag Helper, the model-level error would still be added if the user used the same currency twice, and the form would be redisplayed. Unfortunately, there would have been no visual cue to the user indicating why the form did not submit. Obviously, that's a problem! By adding the Validation Summary Tag Helper, the model-level errors are shown to the user so they can correct the problem, as shown in figure 18.10.

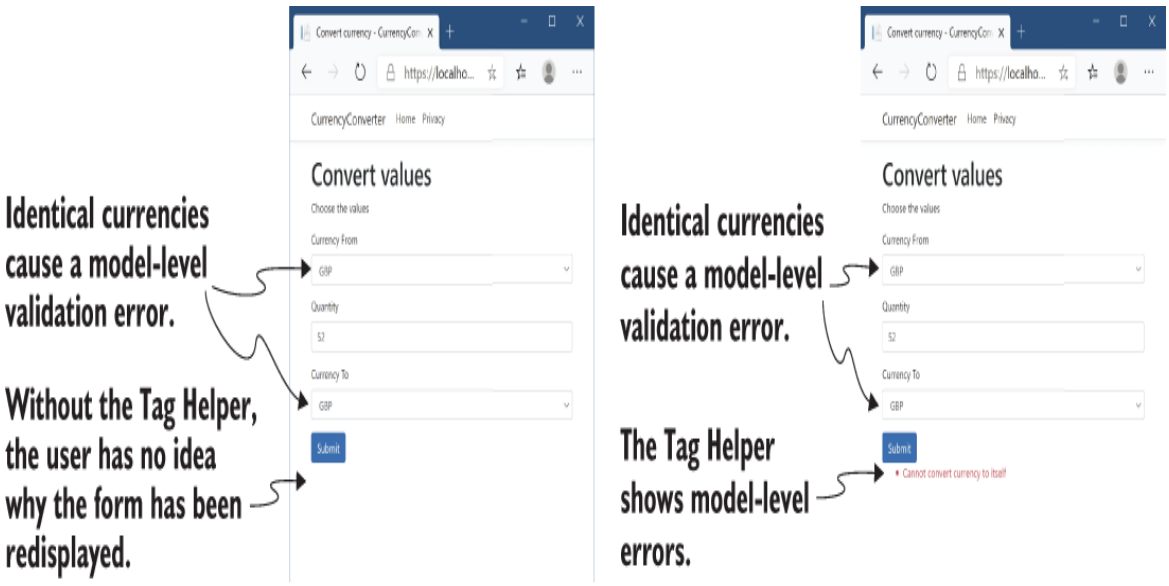


Figure 18.10 Model-level errors are only displayed by the Validation Summary Tag Helper. Without one, users won't have any indication that there were errors on the form and so won't be able to correct them.

NOTE For simplicity, I added the validation check to the page handler. An alternative approach would be to create a custom validation attribute or use `IValidatableObject` (described in chapter 7). That way, your handler stays lean and sticks to the single- responsibility principle (SRP). You'll see how to create a custom validation attribute in chapter 32.

This section covered most of the common Tag Helpers available for working with forms, including all the pieces you need to build the currency converter forms. They should give you everything you need to get started building forms in your own applications. But forms aren't the only area in which Tag Helpers are useful;