❸ An element can be returned only if the id value is a valid _fruit element index.

❹ Returning the data directly returns the data with a 200 status code.

❺ NotFound returns a NotFoundResult, which sends a 404 status code.

In the successful path for the action method, the `id` parameter has a value greater than 0 and less than the number of elements in `_fruit`. When that's true, the value of the element is returned to the caller. As in listing 20.2, this is achieved by simply returning the data directly, which generates a `200` status code and returns the element in the response body, as shown in figure 20.3. You could also have returned the data using an `OkResult`, by returning `Ok(_fruit[id])`, using the `Ok` helper method on the `ControllerBase` class; under the hood, the result is identical.

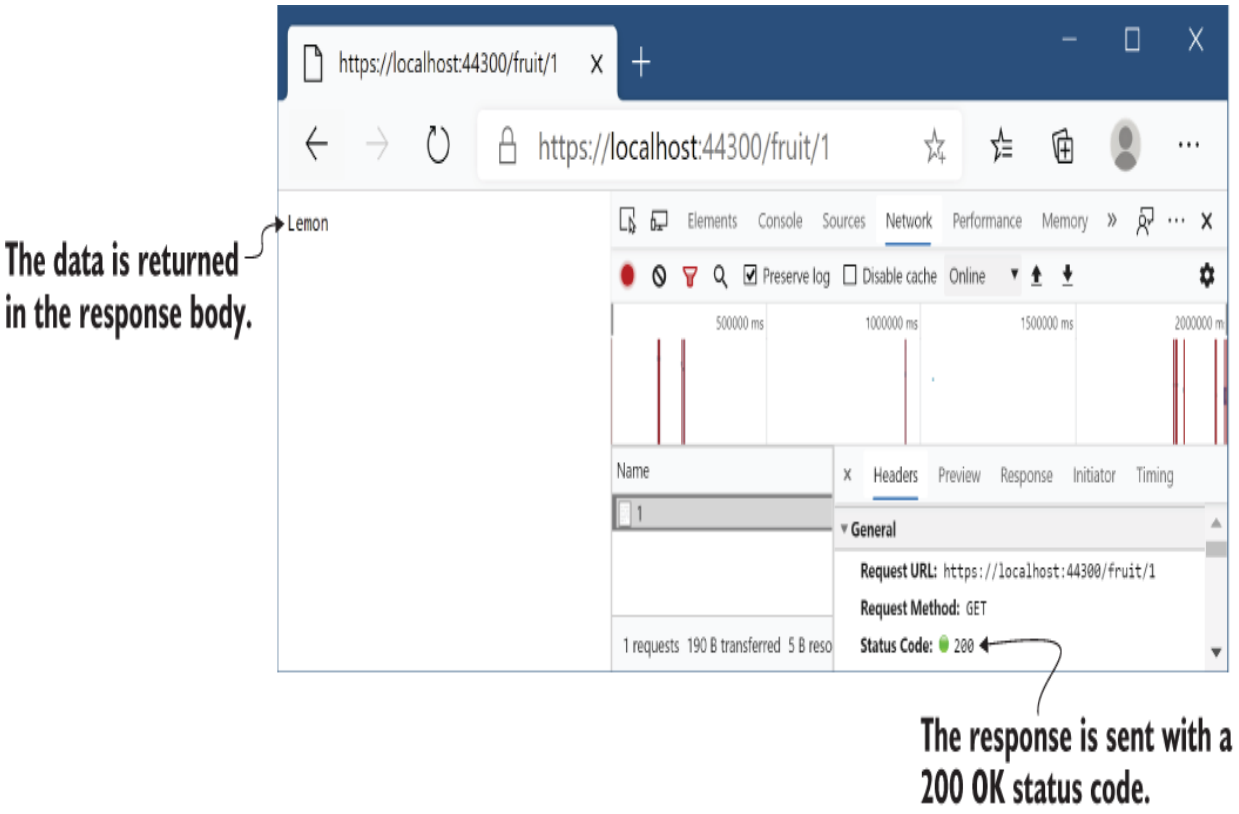


Figure 20.3 Data returned from an action method is serialized into the response body, and it generates a response with status code `200 OK`.