NOTE Some people get uneasy when they see the phrase *helper method*, but there's nothing magic about the `ControllerBase` helpers; they're shorthand for creating a new `IActionResult` of a given type. You don't have to take my word for it, though. You can always view the source code for the base class on GitHub at http://mng.bz/5wQB.

If the `id` is outside the bounds of the `_fruit` list, the method calls `NotFound()` to create a `NotFoundResult`. When executed, this method generates a `404 Not Found` status code response. The `[ApiController]` attribute automatically converts the response into a standard `ProblemDetails` instance, as shown in figure 20.4.

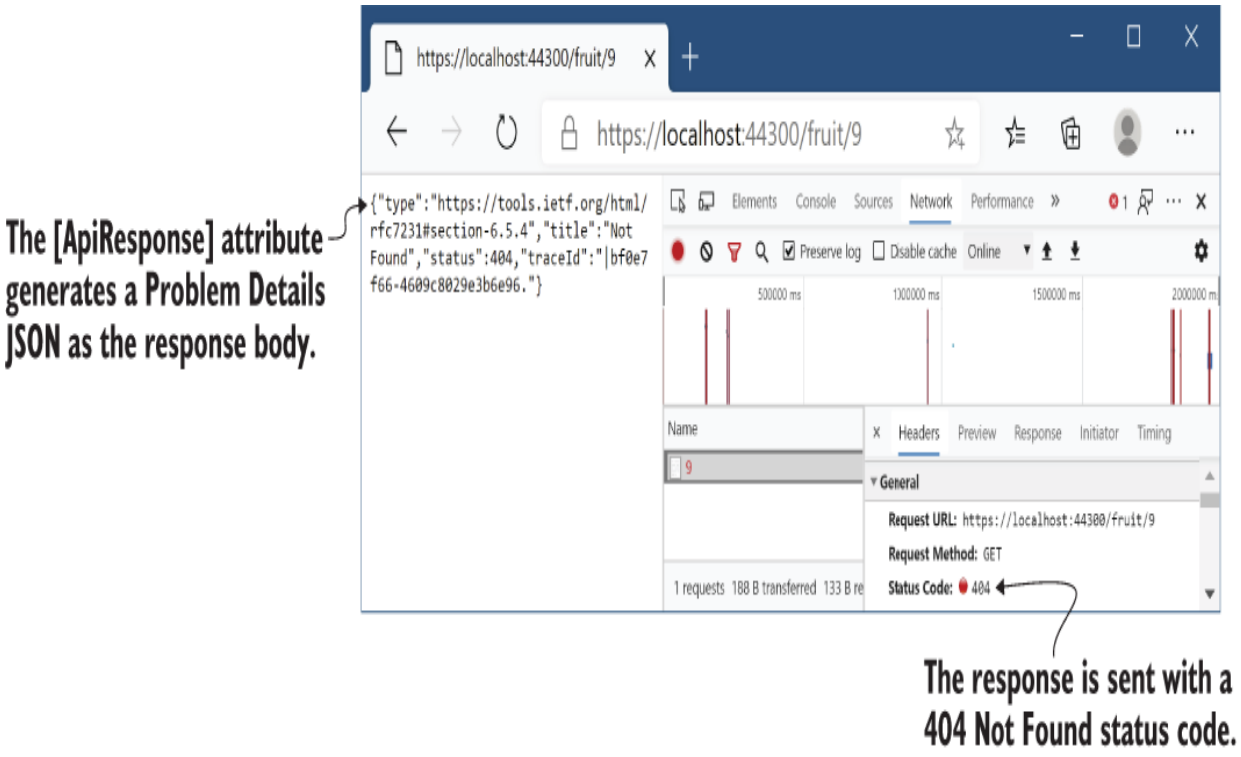


Figure 20.4 The `[ApiController]` attribute converts error responses (in this case a `404` response) into the standard `ProblemDetails` format.