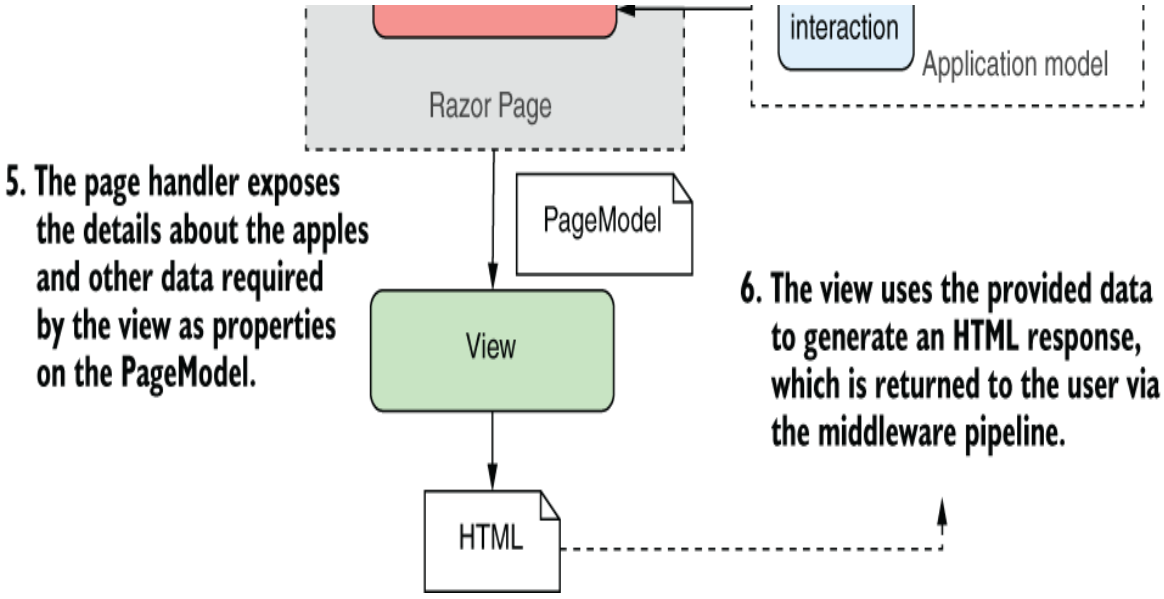


Figure 20.5 Handling a request to a traditional Razor Pages application, in which the view generates an HTML response that's sent back to the user. This diagram should be familiar by now!

The `RoutingMiddleware` routes the request to view all the fruit listed in the `apples` category to the Fruit.cshtml Razor Page. The `EndpointMiddleware` then constructs a binding model, validates it, sets it as a property on the Razor Page's `PageModel`, and sets the `ModelState` property on the `PageModel` base class with details of any validation errors. The page handler interacts with the application model by calling into services, talking to a database, and fetching any necessary data.

Finally, the Razor Page executes its Razor view using the `PageModel` to generate the HTML response. The response returns through the middleware pipeline and out to the user's browser.

How would this change if the request came from a client-side or mobile application? If you want to serve machine-readable JSON instead of HTML,