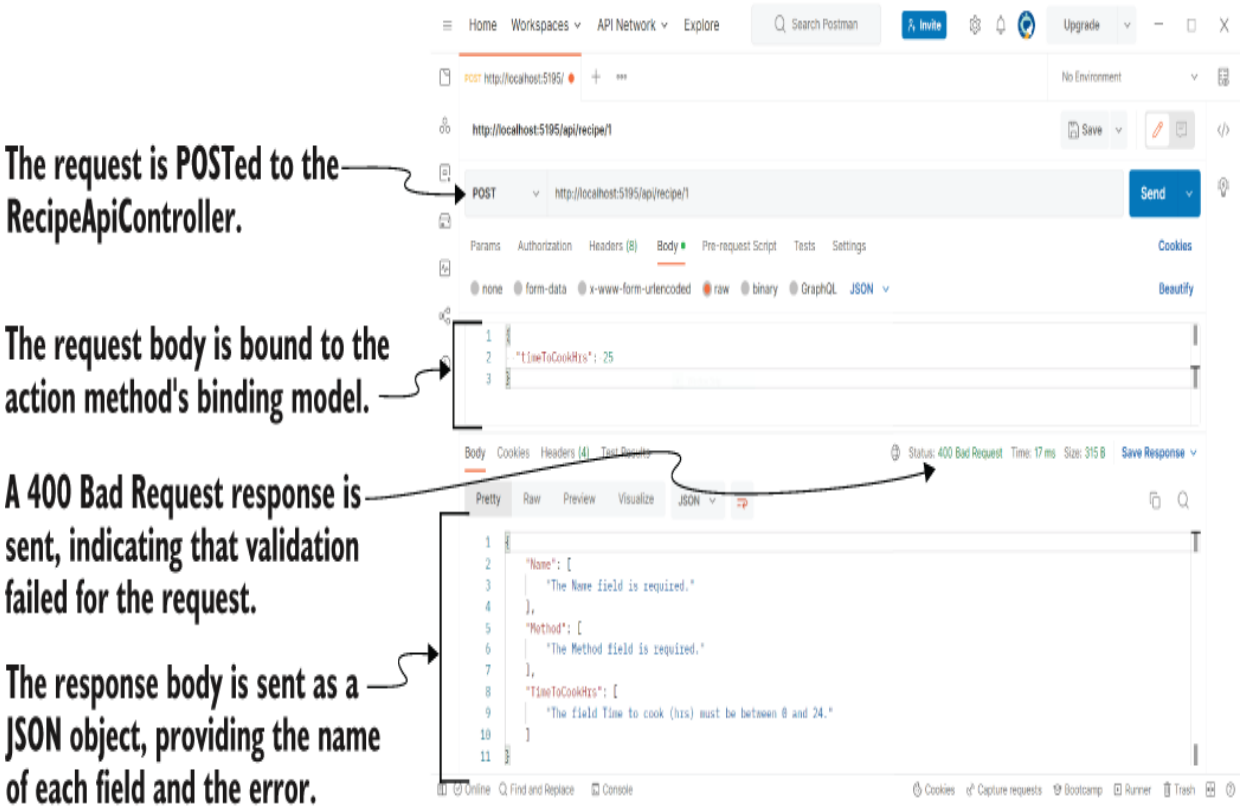


Figure 22.1 Posting data to a web API using Postman. The data is bound to the action method's binding model and validated. If validation fails, it's common to return a `400 Bad Request` response with a list of the validation errors.

You should ordinarily use the `[ApiController]` attribute on your web API controllers, which gives you this behavior (and uses Problem Details responses) automatically. But if you can't or don't want to use that attribute, you can create a custom action filter instead. The following listing shows a basic implementation that is similar to the behavior you get with the `[ApiController]` attribute.

Listing 22.5 The action filter for validating `ModelState`

```
public class ValidateModelAttribute : ActionFilterAttribute      ❶
{
```