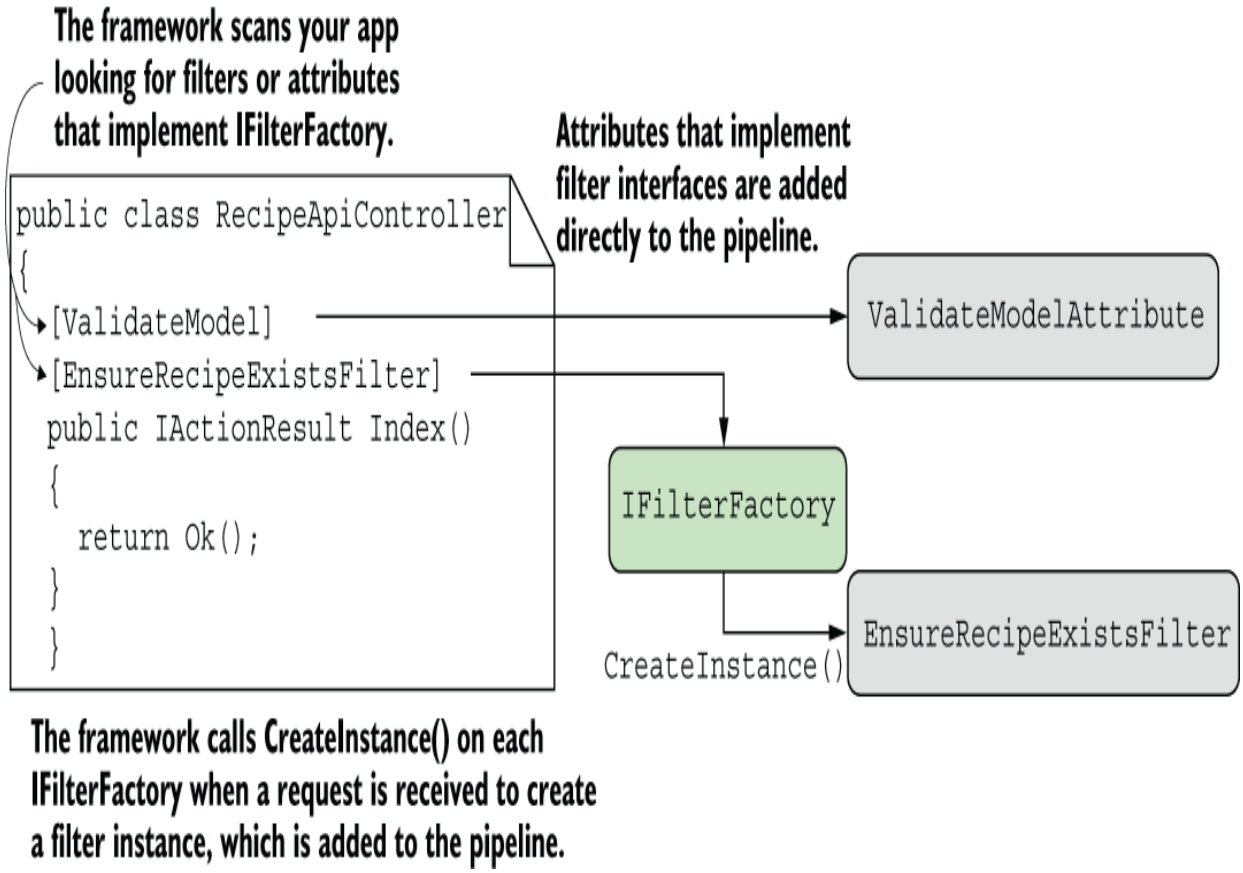


Figure 22.3 The framework scans your app on startup to find both filters and attributes that implement `IFilterFactory`. At runtime, the framework calls `CreateInstance()` to get an instance of the filter.

When an action decorated with `EnsureRecipeExistsAttribute` is called, the framework calls `CreateInstance()` on the `IFilterFactory` attribute. This creates a new instance of `EnsureRecipeExistsFilter` and uses the DI container to populate its dependencies (`RecipeService`).

By using this `IFilterFactory` approach, you get the best of both worlds: you can decorate your controllers and actions with attributes, and you can use DI in your filters. Out of the box, two similar classes provide this functionality, which have slightly different behaviors: