- Principals are represented as entities in the `Employee` namespace, such as `Employee::"bob"`.
- Documents identifiers are scoped in the `Document` namespace.
- As we've seen, ACME has an entity store represented by a relationship graph that includes an `owner` edge linking documents to their owners.
- The context of each access request includes details about the requesting device, such as a boolean flag called `is_managed` that indicates whether the company manages the device.

Cedar evaluates each request by comparing its input to the defined policies. Figure 7.2 shows how Bob's request aligns with the policy from figure 7.1. The arrows indicate how each part of the request is matched or evaluated against the corresponding part of the policy, first by scope (principal, action, resource) and then by conditions in the when clause.

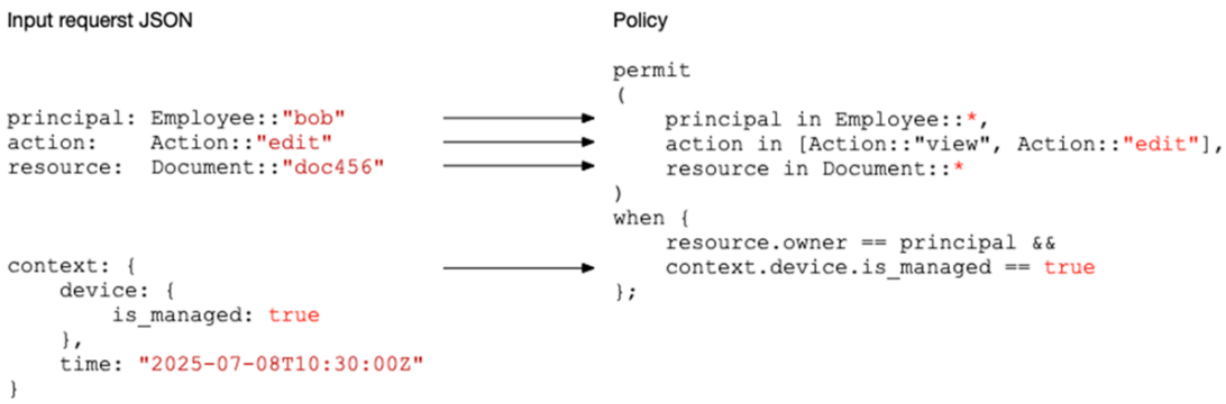


Figure 7.2 Mapping an access request to a policy. Each component of the request (left) is matched against the corresponding part of the policy (right). Scope is matched directly; conditions are evaluated using attributes and context.

Let's walk through a request from Bob, an ACME employee, to edit a document in the Customer Collaboration platform. The request contains the information needed to evaluate the policy:

- Principal: `Employee::"bob"`
- Action: `Action::"edit"`
- Resource: `Document::"doc456"` (which has owner: `Employee::"bob"`)
- Context: `{ device: { is_managed: true } }`