Figure 8.2 shows these relationships as a graph.

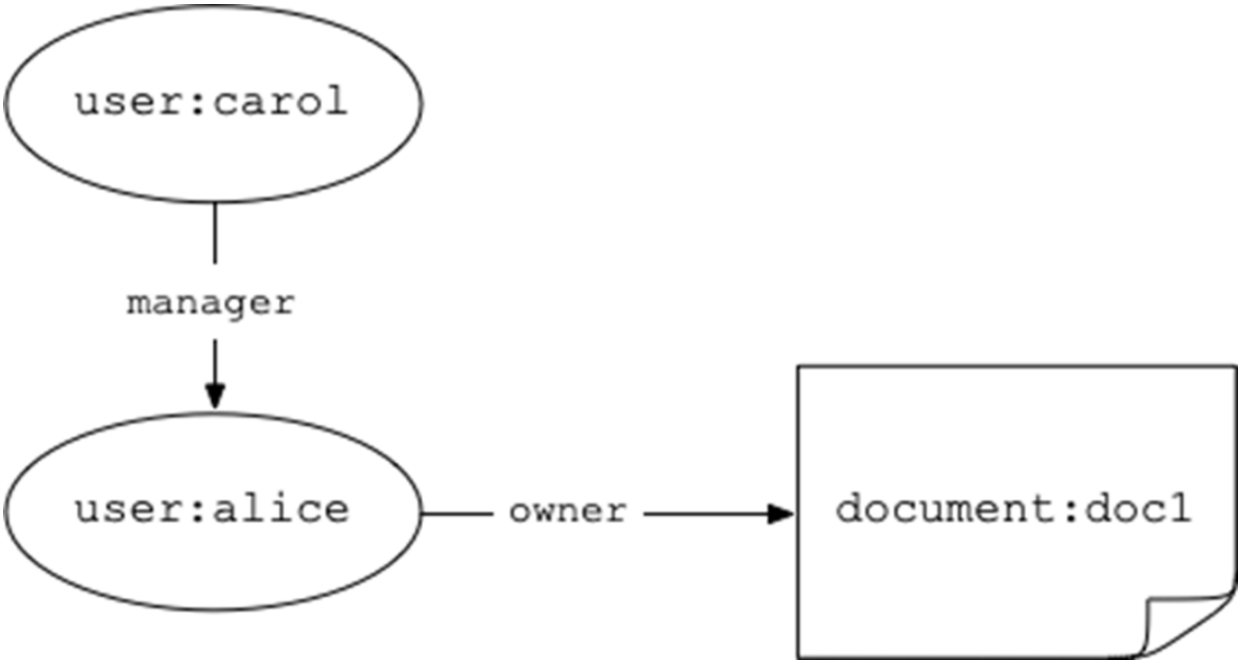


Figure 8.2 Relationship-based access in OpenFGA. This example shows how OpenFGA encodes permissions as logical paths through structured relationships, allowing for dynamic and delegatable access without altering the underlying policy logic.

When Carol tries to access `doc1`, OpenFGA evaluates the permission check:

```
{
  "user": "user:carol",
  "relation": "can_access",
  "object": "document:doc1"
}
```

To answer this request, OpenFGA:

1. Finds that Alice is the owner of `document:doc1`
2. Sees that Carol is Alice's manager
3. Concludes that Carol satisfies the `owner->manager` rule
4. Returns `true`, so access is permitted

This model lets ACME support delegation without the need to update the logic each time roles or reporting structures change. When someone becomes a manager, they automatically receive the permissions tied to that