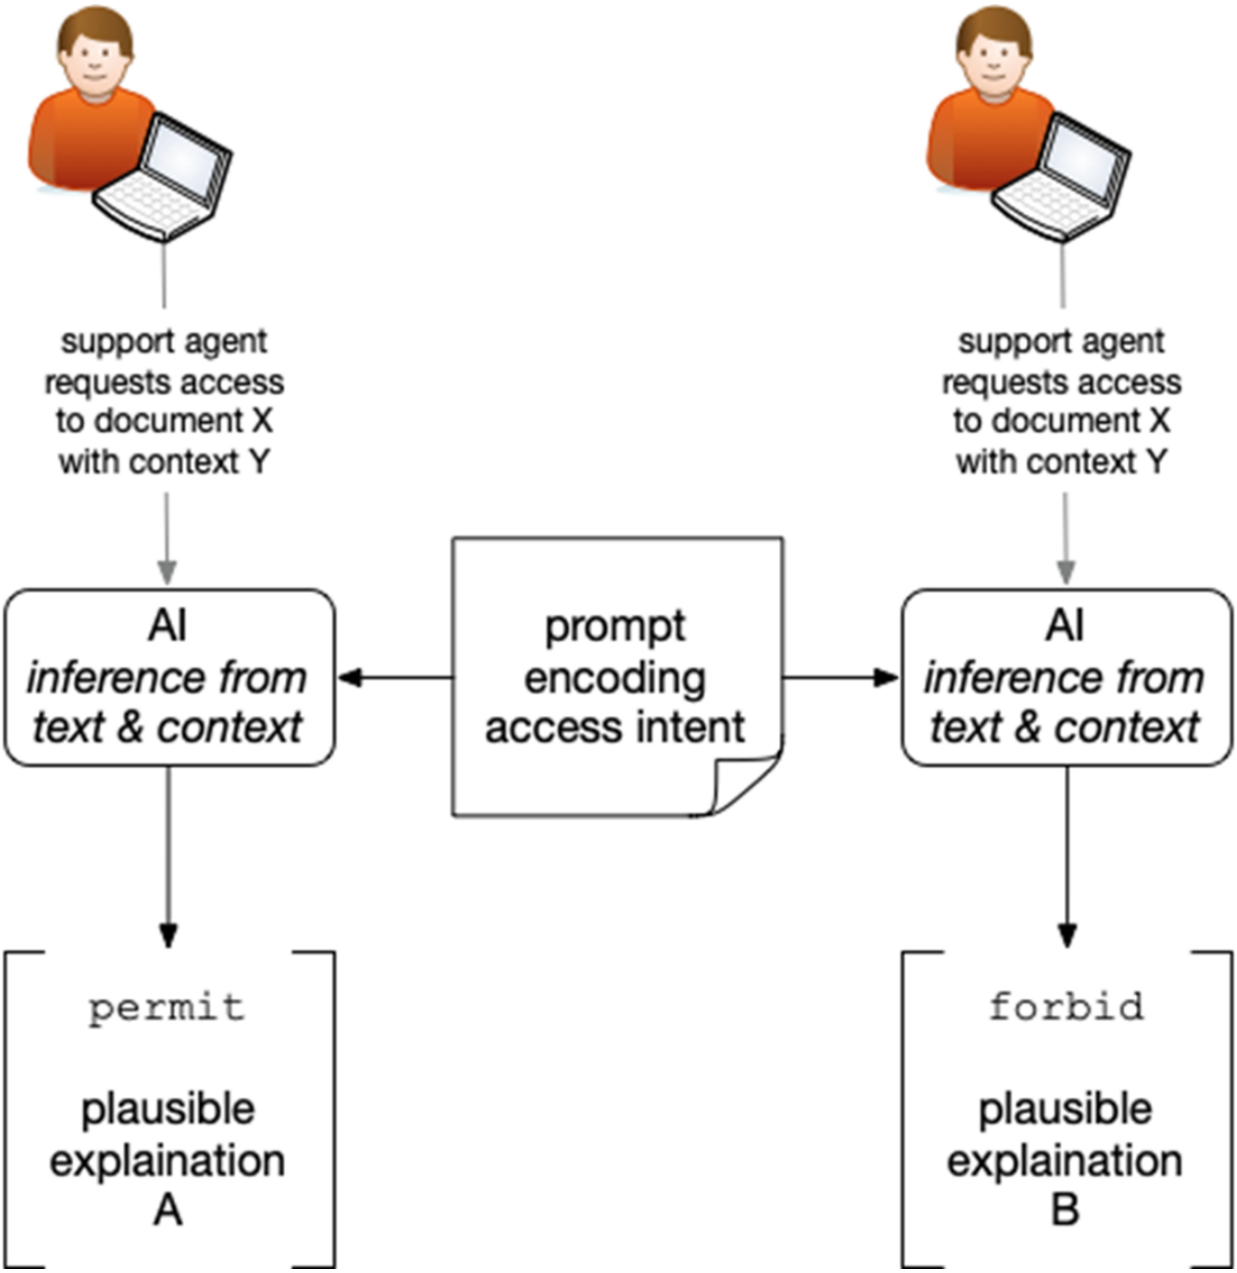


Figure 17.1 Nondeterministic AI authorization. When authorization intent is embedded in prompts and inferred by an AI system, identical requests with the same context can result in different outcomes. In this example, the same access request and prompt lead to both permit and deny decisions, each with a plausible explanation. Since the reasoning is inferred rather than evaluated as policy, the results are not repeatable and cannot be used as a reliable basis for access enforcement.

Authorization decisions must be consistent and reproducible. The same request, evaluated under identical conditions, should always produce the same result. They must also be explainable in clear terms. When access is denied, the system should be able to reference a specific policy, rule, or