Make sure you save all the changes! To run the test, open your terminal and type in the following command:

```
npm run test:web:consumer
```

If everything has been set up well, running this command should return one passing test and it should provide the output shown in figure 4.6.

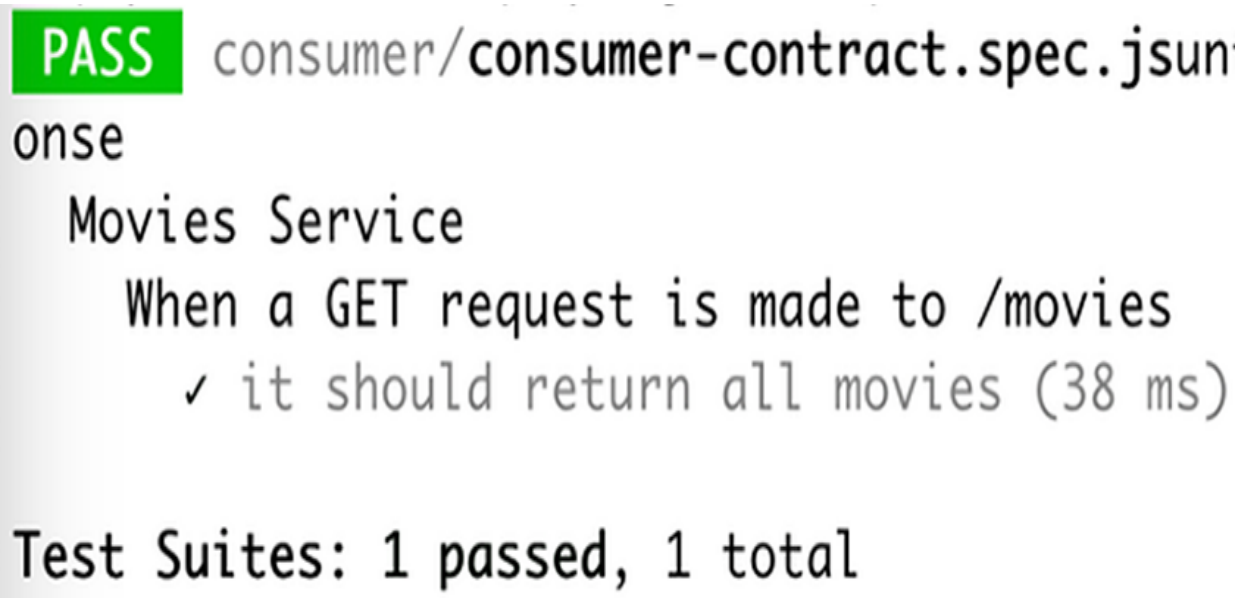


Figure 4.6 Test output of running the consumer contract test

When the test run completes, Pact will also generate the contract, which is saved in the **`pacts`** directory. You should now see a similar folder structure output like this:

```
> consumer-web
> data
> pacts
  { } WebConsumer-MoviesAPI.json
> provider
package.json
package-lock.json
README.md
```

The contents of the contract should include information about the consumer and provider name, the interaction that has been registered, the request and response details expected from the provider, the matching rules specified, and any other relevant metadata. You should see a similar contract in JSON format, like this: