The builder parameter argument will form the core of the `createPact` function. The builder sets up the interaction related to the specific API request that will be tested, as shown in figure 5.4.

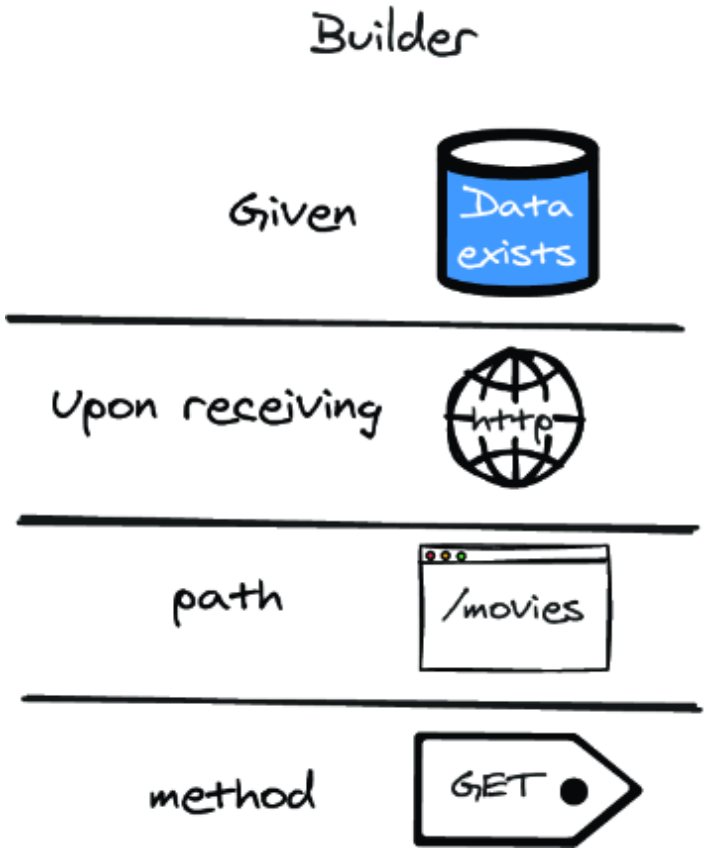


Figure 5.4 The Pact contract builder to be passed to the provider includes the given data upon receiving the HTTP request, URL path, and HTTP method.

There is a chain of steps to be performed using the builder: first setting the `given` statement, which takes a string argument. The given string sets out any prerequisites the provider service needs to set up before running the test. In the movie example app, this outlines that when requesting to get movies, there must be a movie that exists in the database. The string `"a movie exists"` is then used by the provider service to trigger the creation of movie data, as shown in listing 5.10. Following the given statement, the `upon receiving` method is a descriptive sentence relating to the request. This description is the start of the specific interaction with the provider service. Then, the subsequent methods define the URL path and HTTP method of the request.