Listing 5.10 Pact Builder, part 1

```
return builder
    .given("a movie exists")
    .uponReceiving("a request for all movies")
    .path("/movies")
    .method("GET")
```

The next part of building the Pact contract is the response methods, which will form what the consumer expects to receive from the provider service as shown in figure 5.5.

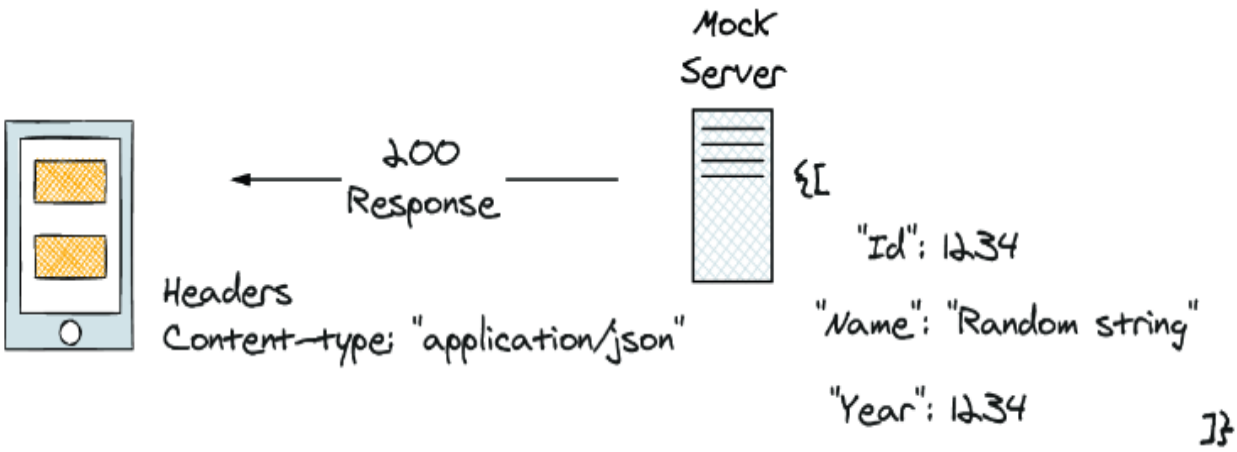


Figure 5.5 Pact response from the mock server with a 200 status code, header content type, and response body

The mock response contains everything you expect from the provider service, including the status code, headers, and response body. You'll set up the expected response within the Pact mock server with random values. The code in the following listing shows how these values are generated from the Pact domain-specific language (DSL).