On completion of the test, if you get a green tick, then the Pact file should have been written to the pacts folder within the build folder, as shown in figure 5.8.

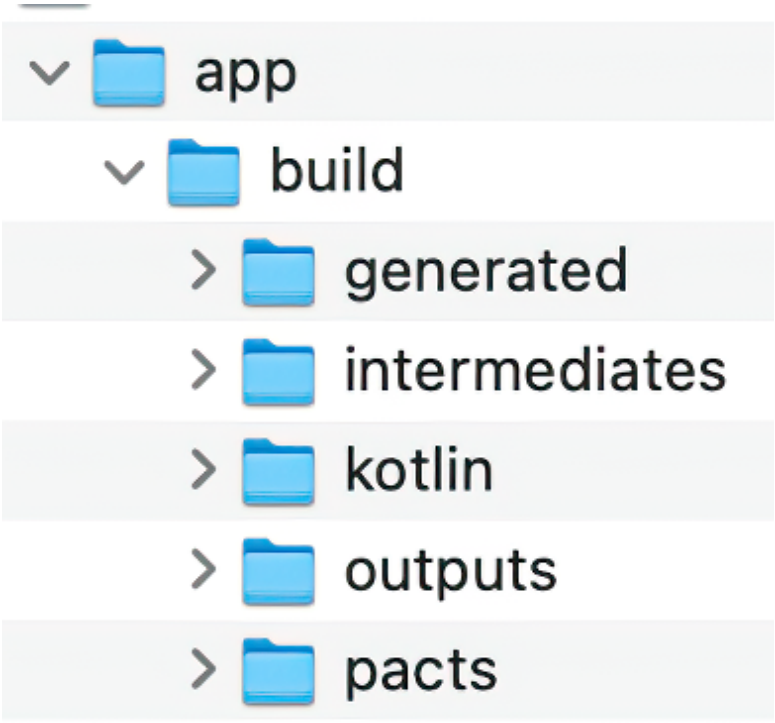


Figure 5.8 Android studio project folders app > build > pacts, with the pacts folder open showing the movie-android-app-movie-api.json file

The Pact JSON file that we built maps all the sections to JSON objects. Listing 5.16 shows the consumer and provider names. This creates the link in the Pact Broker for the interactions within the Pact file.

Listing 5.16 Android Movie Pact, part 1

```
"consumer": {
  "name": "MoviesAndroidApp"
},
"provider": {
  "name": "MoviesAPI"
}
```

Then, you'll see the array of interactions between the consumer and the provider. First, the `providerStates` array, which relates to the `given` method, is the state that the provider needs to be in before the test on their side. Following the response object is the `generators` object, containing each of the attributes defined as a specific type, for example, integer type.