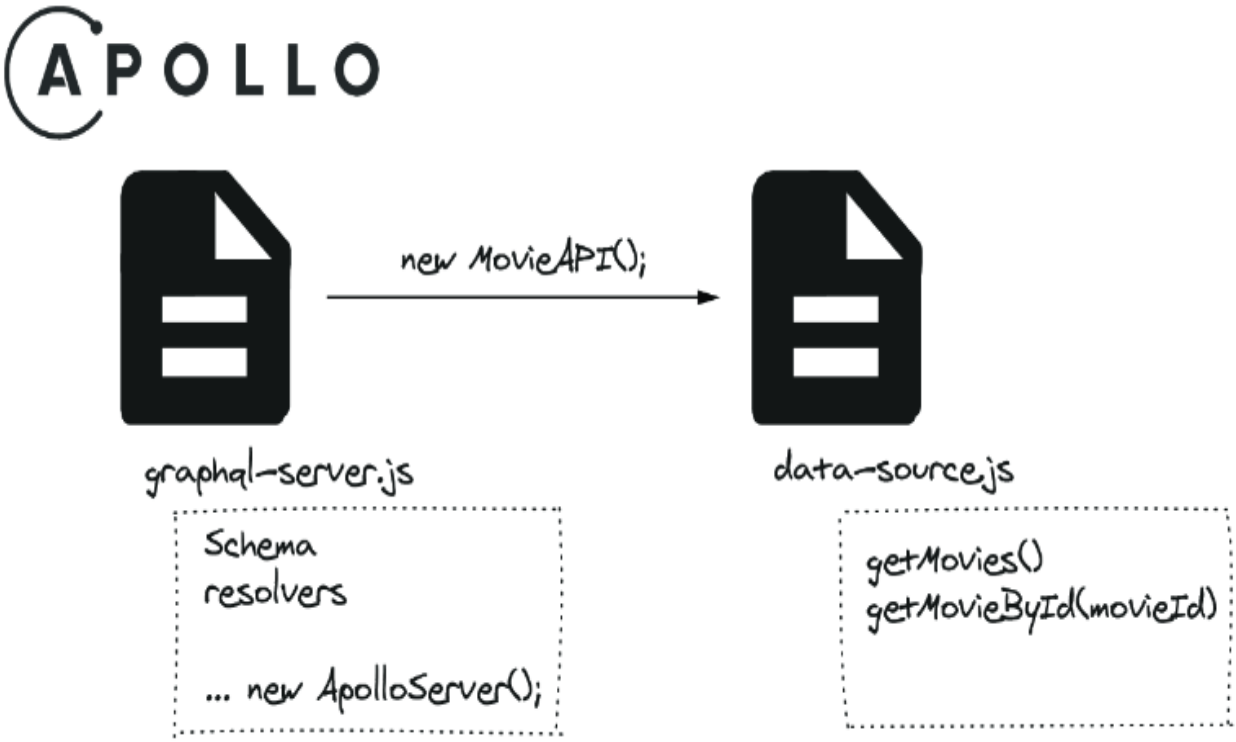


Figure 7.3 GraphQL API at a glance with all the relevant files

AN OVERVIEW OF DATA-SOURCE.JS

Inside the graphql folder, you should see another folder named provider. If you expand the provider folder, you should see a file named data-source.js, which should have the following code:

```
const { RESTDataSource } = require('@apollo/datasource-rest');

class MovieAPI extends RESTDataSource {
  baseURL = 'http://localhost:3001';

  async getMovies() {
    return this.get('/movies');
  }

  async getMovieById(movieId) {
    return this.get(`/movie/${movieId}`);
  }
};

module.exports = MovieAPI;
```

The package `@apollo/datasource-rest` exports a class called `RESTDataSource`, which is used to fetch data from REST APIs easily. `RESTDataSource` provides built-in methods such as `this.get()` to perform