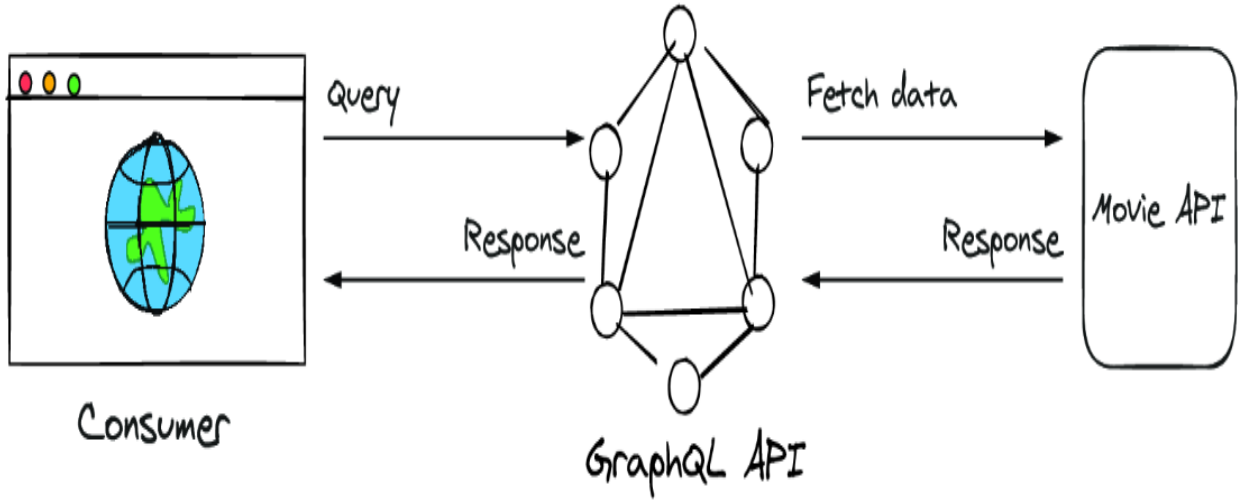


Figure 7.7 Consumer sending a query to the GraphQL server, which also has a dependency on Movies API

We can introduce contract testing in a few ways with this setup:

- Create a contract test between the GraphQL server and movies API, where the GraphQL server is the consumer, and the movies API is the provider. With this approach, the GraphQL server needs to have some form of collaboration with its consumers to make sure that their expectations will be covered.
- Create a contract test between the consumer and GraphQL server as the provider, and stub out the call to the movies API.
- Create a contract test between the consumer and GraphQL server as the provider, and make sure the movies API is up and running.

When choosing the approach, use what makes the best sense to you and your team. Because our example project is simple, we've decided to follow the last approach and make sure that the movies API is running.

To create the provider contract test, create a new file in the provider folder called graphql-server-contract.spec.js. The provider contract test will look similar to the one you first saw in chapter 6, apart from the `provider` and `providerBaseUrl` values: