version of the event message will change. The contents of the message can be backward compatible, but imagine when a breaking change needs to be introduced. The subscribers of the event message need to be informed and implement the code they need to cope with the breaking change. Using contracts, the event producer can ensure that all consumers have adopted the new major version before deprecating the previous version of the event message. Figure 8.1 shows the event message with a breaking change between contract versions.

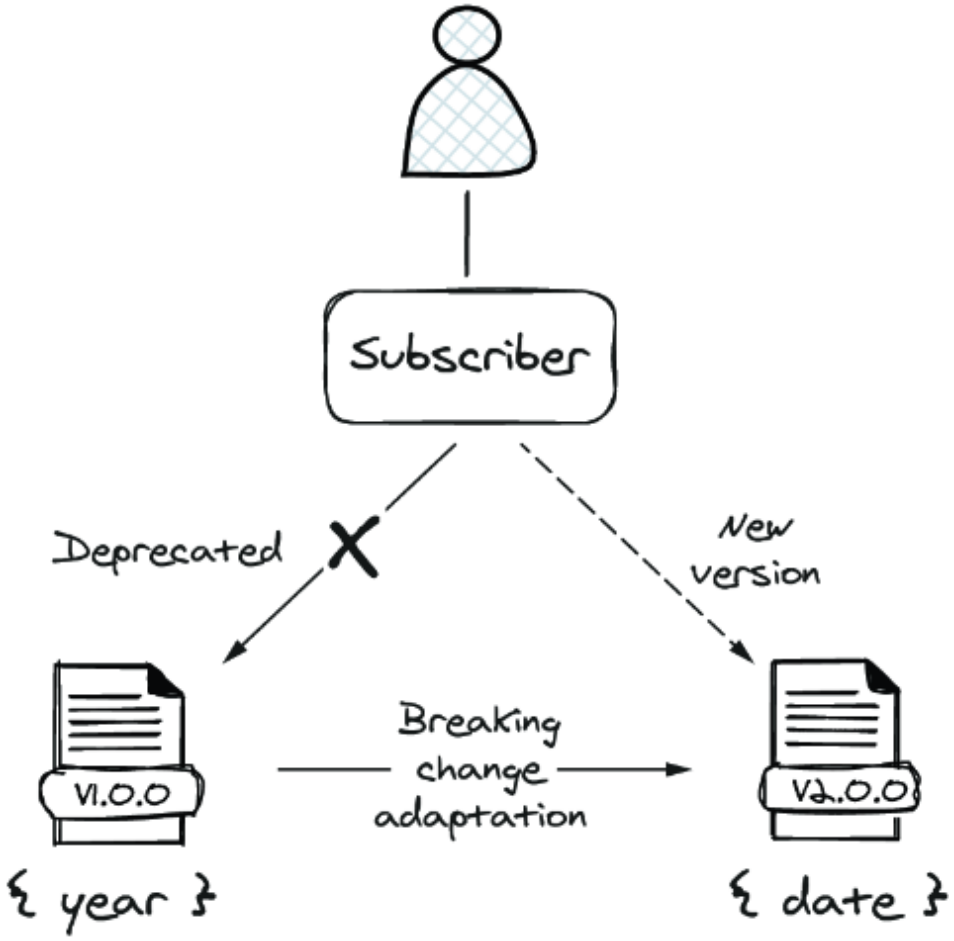


Figure 8.1 When breaking changes are introduced to events, the subscriber needs to migrate from version 1 to 2 by implementing the new message contract changes.

8.1 Introduction to asynchronous API testing

Throughout the chapter, we'll reference an event infrastructure that is just an adaptation of the movies example used in previous chapters. In an