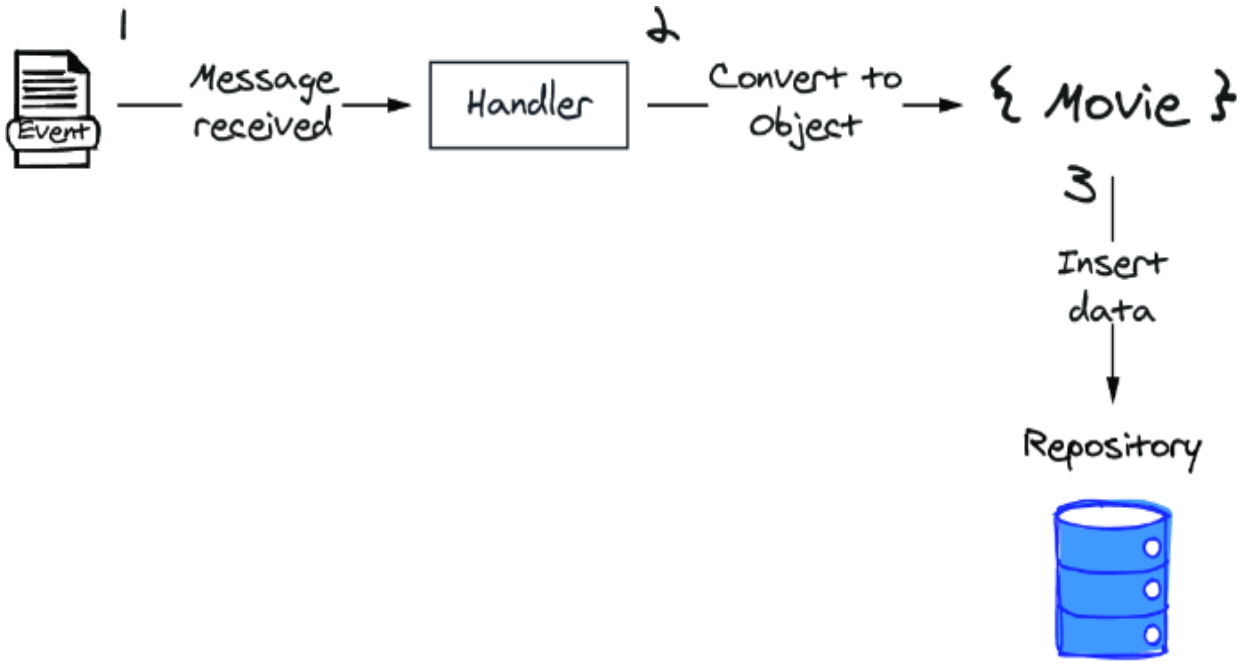


Figure 8.4 Steps to handle the event from receiving the message to inserting data into database

Listing 8.2 `Movie` handler

```
const repository = require("./movie.repository");
const Movie = require('./movie');

const handler = (message) => {     #1
  return Promise.resolve(
  repository.insert(     #2
    new Movie(message.name, message.year)     #3
  )
)
}

module.exports = handler
```

#1 Takes the event message
#2 Converts the message to the Movie object
#3 Inserts data into the database

The implementation of the movie handler, shown in listing 8.2, contains references to the movie model object and movie repository. The movie repository contains the `insert` method, which takes the `movie` object type (see listing 8.3) as an argument. The event message produced by the provider only sends the name and year as the consumer generates the ID.