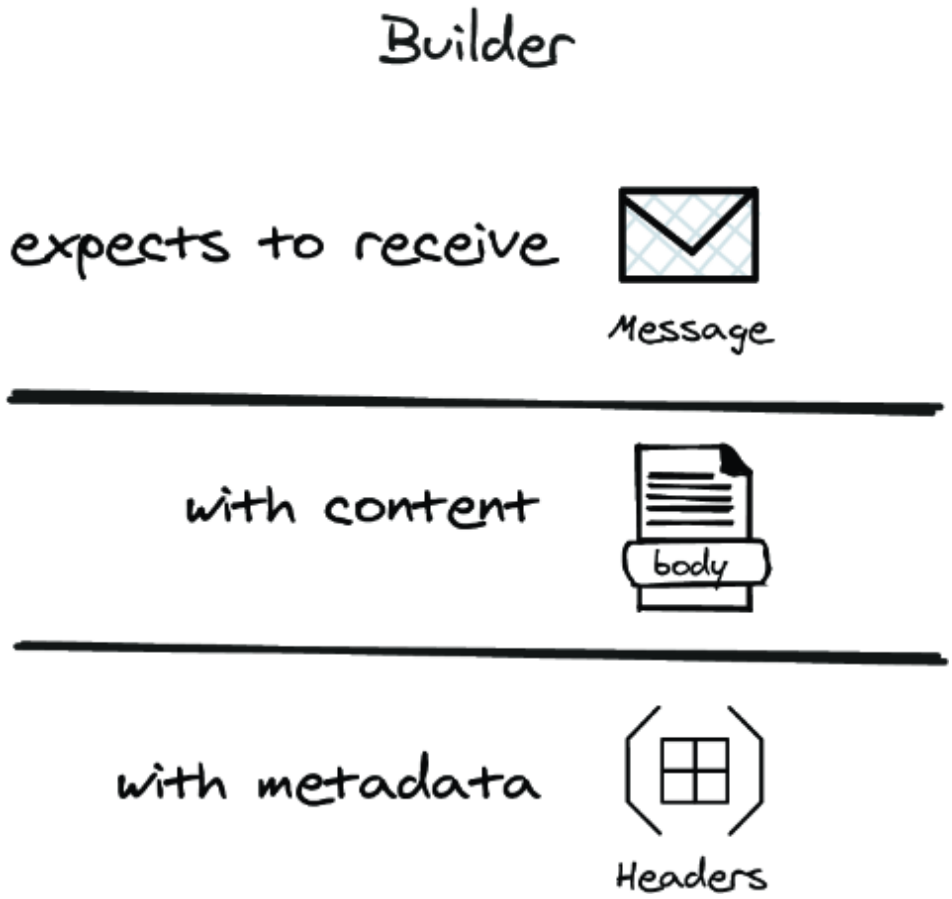


Figure 8.8 The Pact contract builder to be passed to the provider includes the following: expects to receive, with content, and with metadata.

The first step of the builder, Expects to Receive describes the specific interaction: in this example, adding a new movie, as shown in listing 8.10. This will be passed to the provider, who can set any data they require before the test starts and produce the `movie add event`, for example, if they need to delete any movie of the same name in the database to make the movie name a unique value.

Listing 8.10 Expects to receive

```
.expectsToReceive("a movie add event")
```

The second step of the builder, With Content, states the expected message content, including the JSON key-value pairs and type matchers. In this example, as shown in listing 8.11, the `like` matcher is used, which just requires the actual value to be something like that type of value.