Listing 8.11 With content

```
.withContent({
  name: like("The World's End"),
  year: like("2013")
})
```

The third step of the builder, With Metadata, sets any header style values needed. In this Kafka example, as shown in listing 8.12, the Kafka topic is sent alongside the content type of the content.

Listing 8.12 With metadata

```
.withMetadata({
  "contentType": "application/json",
  "kafka_topic": "movies",
})
```

Once the builder components have been set to define the expectations of the event message, then the event handler must be verified to check that the expectations match the actual event handler code, as shown in figure 8.9. We do this by using Pact's `asynchronousBodyHandler` function and passing the `movieEventHandler` as an argument, as follows.

Listing 8.13 Verify `event handler`

```
.verify(asynchronousBodyHandler(movieEventHandler));
```

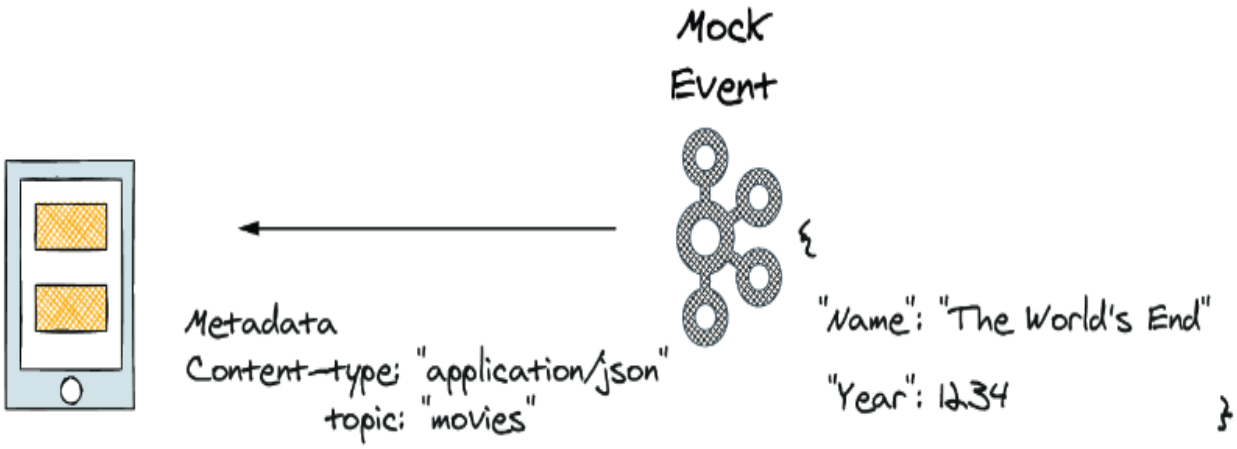


Figure 8.9 Pact response where the mock event becomes the actual response content with metadata within the test

Listing 8.14 shows show how the test looks all together. All the builder components connect with the `messagePact` object, which was set up