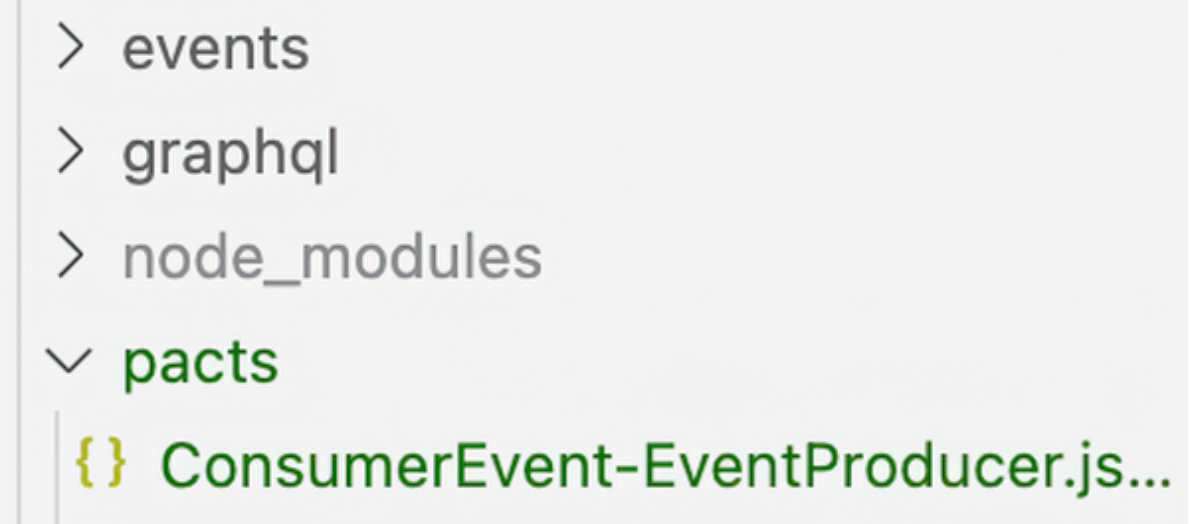


Figure 8.11 Pacts folder showing the generated ConsumerEvent-EventProducer.json file ready to be published to the Pact Broker

The Pact JSON file that we built maps all sections to JSON objects. Listing 8.15 shows the consumer and provider names. This creates the link in the Pact Broker for the interactions within the Pact file.

Listing 8.15 Event movie Pact, part 1

```
"consumer": {
  "name": "ConsumerEvent"
},
"provider": {
  "name": "EventProducer"
}
```

Then, in the penultimate section, the messages array appears between the consumer and provider. First, the `contents` object, which was generated from the `withContent` method, contains the message values provided within the test. As shown in listing 8.16, the next field, `description`, was generated from the `expectsToReceive` method. The next section, `matchingRules`, references the matchers used within the `withContent` method, for example, `like("2013")`, as shown in figure 8.11. Finally, the metadata object contains the values defined within the `"with metadata"` method, as shown in figure 8.12.