8.7 Event producer test implementation

We'll be setting up the test alongside the movie.event code (see figure 8.14). This enables any changes to the event message to automatically be picked up by the provider test implementation.

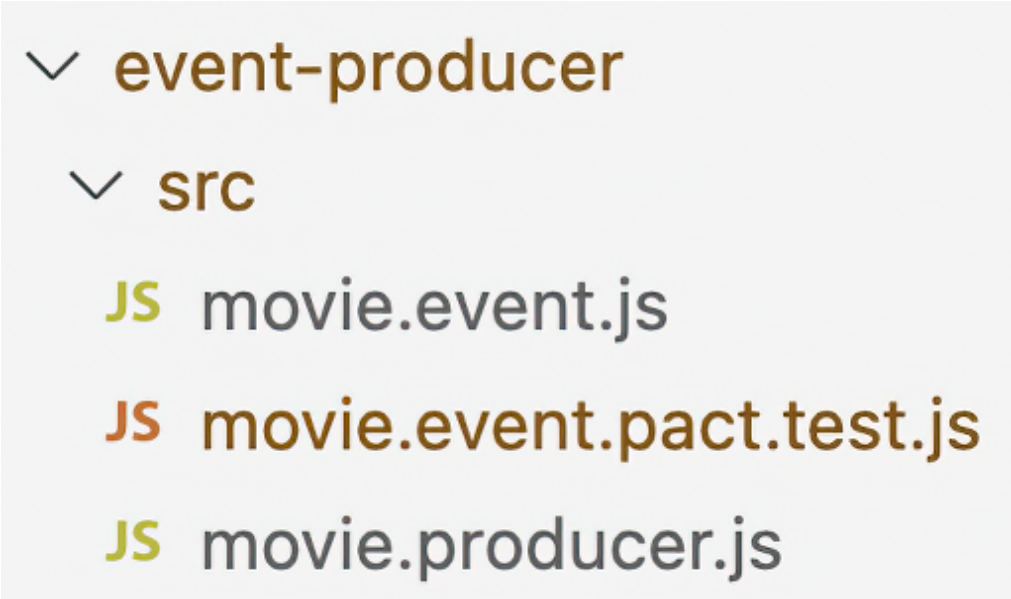


Figure 8.14 Event producer folder structure, including movie.event.pact.test under the source folder alongside movie.event and movie.producer, similar to unit test location

When starting to write the producer test, first perform the imports from Pact and the `createMovie` function from movie.event, as follows.

Listing 8.21 Movie producer test setup

```
const {
    MessageProviderPact,
    providerWithMetadata,
  } = require('@pact-foundation/pact');
  const { createMovie } = require('./movie.event');
```

The main part of the message provider test is the constructor of the `MessageProviderPact` method. This sets the message provider's contents and metadata, as well as the Pact Broker and provider details. The message providers section takes an object, with the Pact interaction description as the key—`"a movie add event"` in this example. Then, the value of the message provider is the provider with the metadata function. The `providerWithMetadata` function constructs the body content as the first