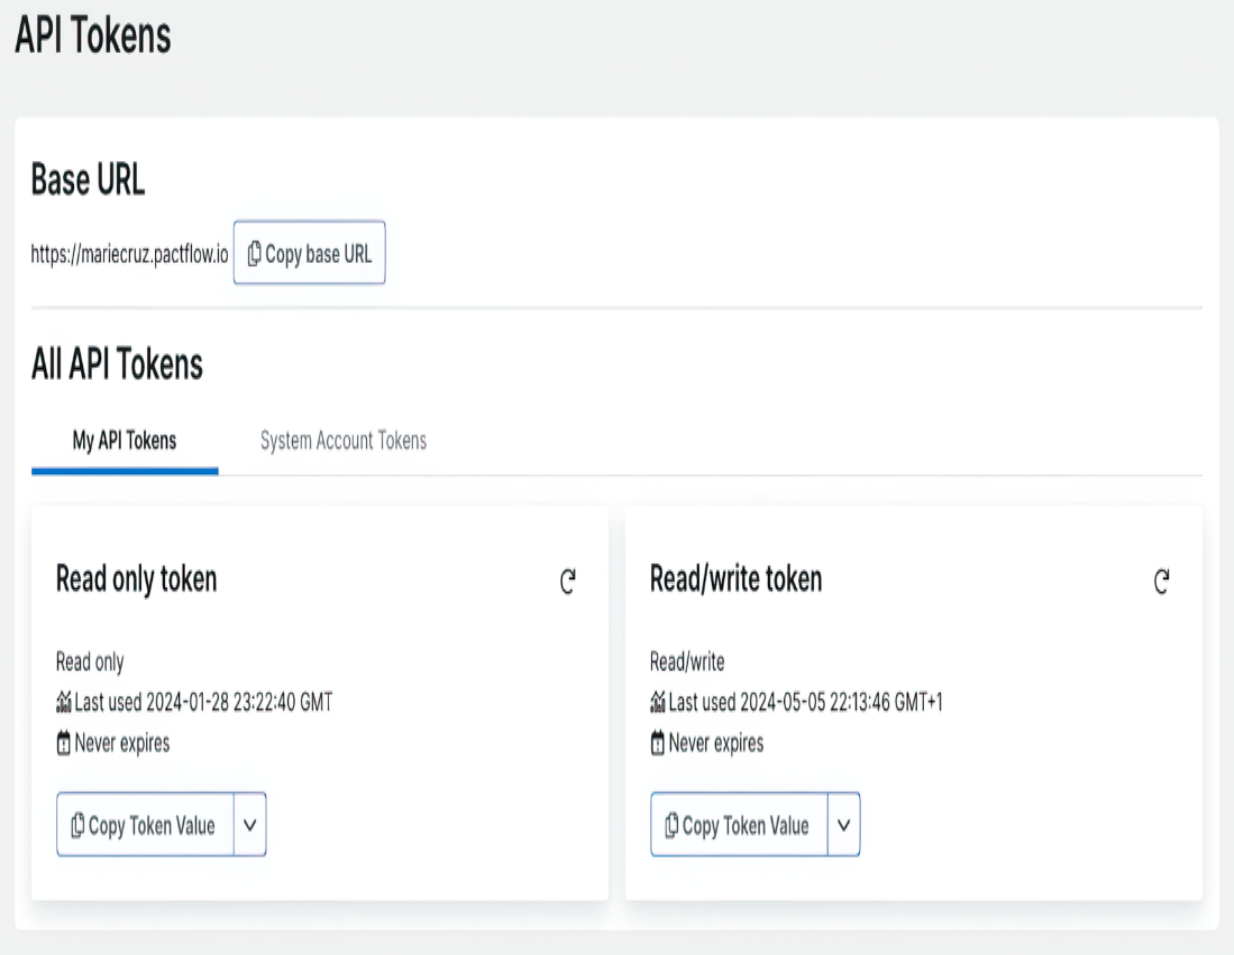


Figure 9.9 The Pact Broker settings page contains API tokens for publishing and verifying contracts.

Communicating with Pact Broker is done via a CLI tool that provides a wrapper around the API. The publishing endpoint is a `PUT` method, which takes a Pact contract as the body. The URL subdirectory comprises the provider and consumer names, followed by the contract version. Here's an example:

```
https://mariecruz.pactFlow.io
/pacts/provider/MyProvider/consumer/MyConsumer/version/latest
```

The `version` part of the URL can be substituted with a specific version number. In the scenario depicted earlier in figure 9.2, you're developing a web app in parallel with changes being made to an API provider. The web app team backlog has different priorities compared with the API provider; therefore, changes are made out of sync. The implications of this in terms of the contract are that the API provider may be a couple of versions ahead