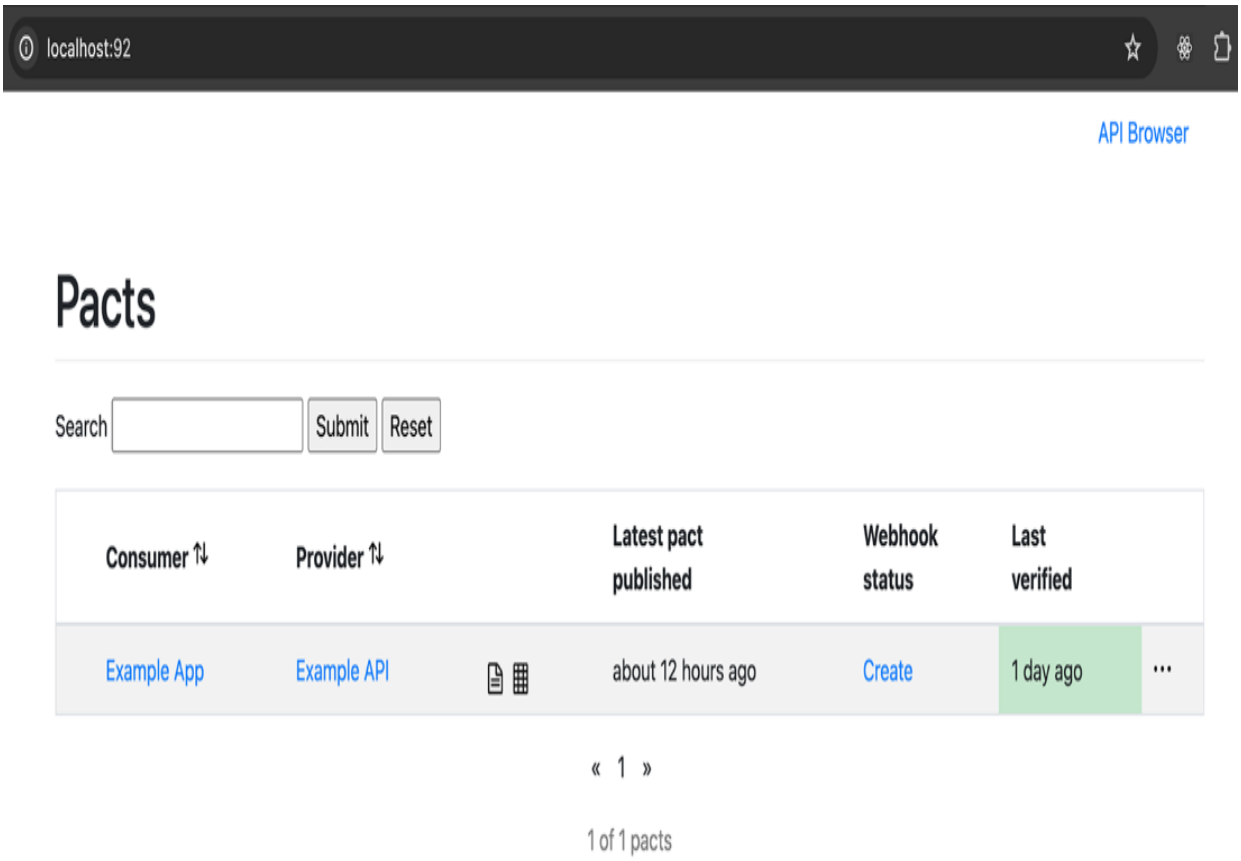


Figure 9.15 Dockerized Pact Broker service running on localhost, ready to accept new contracts

Compared with the PactFlow version in the previous part of the chapter, the UI is more basic, and there are minimal settings and additional features configured. Authentication with a username and password was added to the Pact Broker instance as well.

To communicate with the broker, use the Pact CLI, as shown in section 4.4 or also provided as a Docker image. As an example, let's publish the Pact files within the pacts folder of the book GitHub project (https://github.com/mdcruz/pact-js-example). Simply run the command from the root of the pact-js-example project, shown in listing 9.5. The command mounts the local folders to be accessible in the Docker container and sets the Pact Broker base URL to publish the contracts with the app version.