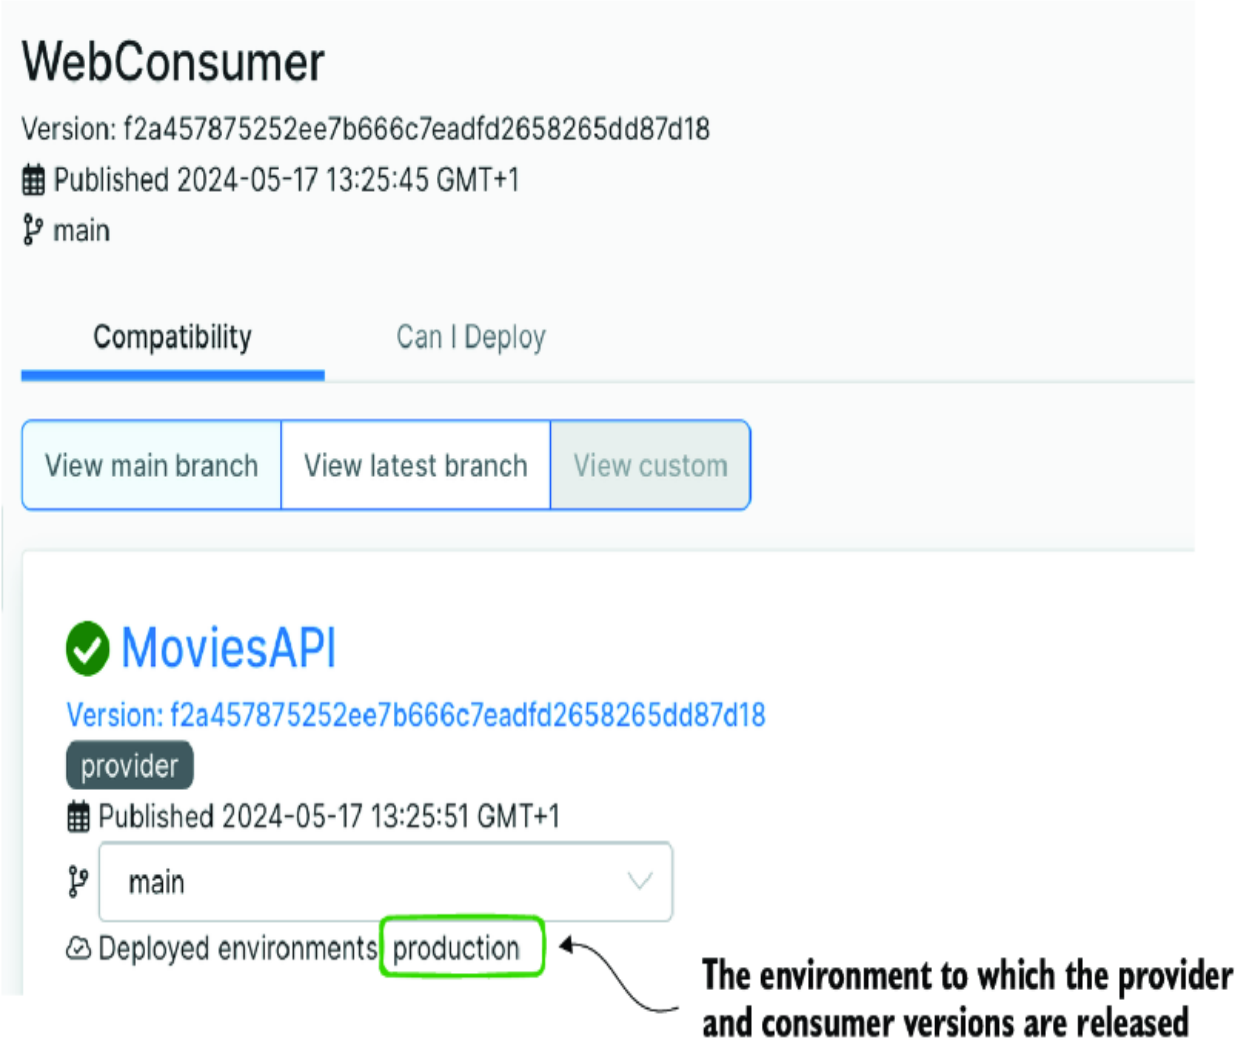


Figure 10.10 WebConsumer and MoviesAPI integration with deployments recorded to the production environment. This indicates that these two versions are available in production.

Similarly, you can also test the changes locally by replacing `$GITHUB_SHA` with your version value. On your terminal, run commands `npm run record:web:consumer: deployment` and `npm run record:web:provider:deployment`.

RECORDING A RELEASE

The steps for recording a release are very similar to how we've recorded a deployment. We'll still use the `pact-broker` command but will use the `record-release` option this time. As an example, if you want to record a release for the mobile consumer that we introduced in chapter 5, you can use the following command instead: