```
jobs:
  contract-test:
    runs-on: ubuntu-latest
    steps:
     …
      - name: Run provider contract tests
        run: npm run test:provider
      - name: Can I deploy provider?
        run: npm run can:i:deploy:provider
      - name: Record provider deployment
        run: npm run record:provider:deployment
      - name: Can I deploy web consumer?
        run: npm run can:i:deploy:consumer
      - name: Record web consumer deployment
        run: npm run record:web:consumer:deployment
```

In real-world projects, these steps must be added before merging changes to a main branch or deploying to any environment. If you have test and production as your environments, it's recommended to have two can-i-deploy scripts for each environment just in case the versions deployed in each environment differ.

Testing the workflow is similar to how we've tested the deployments and/or releases feature. Once the GitHub workflow has finished running, click the workflow, view the workflow details, and expand the steps we just added to integrate can-i-deploy. You should see an output similar to figure 10.13.

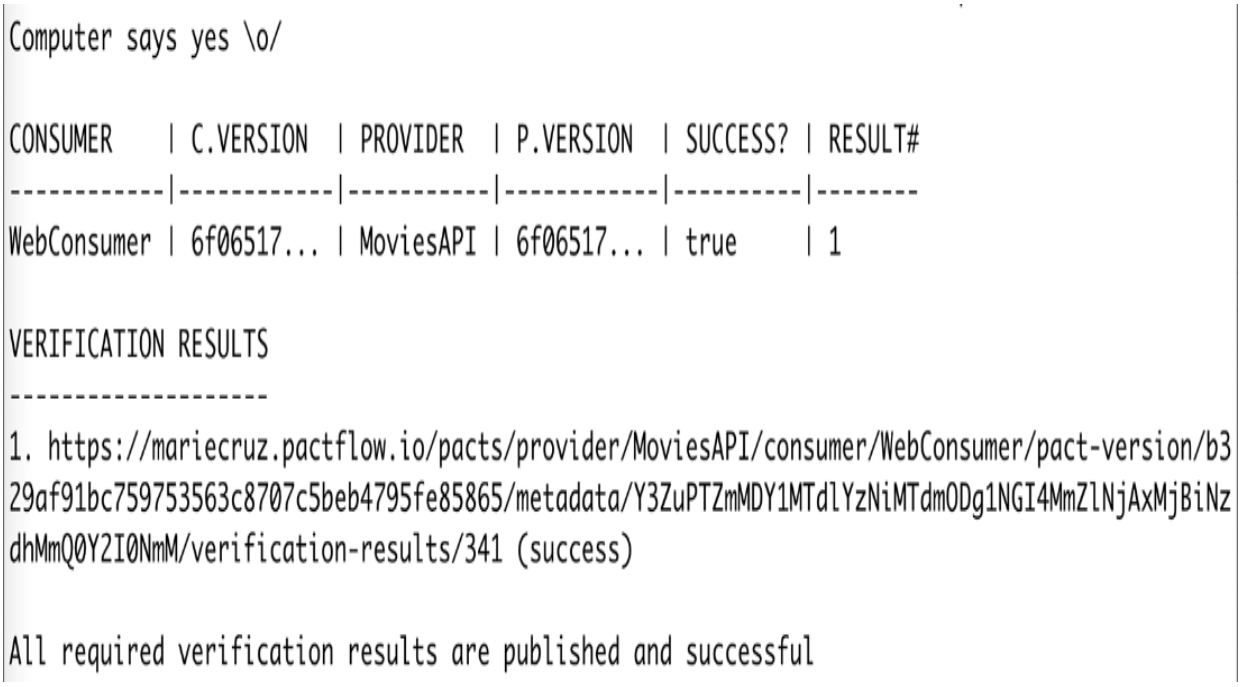


Figure 10.13 Test output of running the `can:i:deploy:consumer` command