Now that everything is set up, run the Cypress test. The contract is generated from the mocked response setup in listing 11.1 shown earlier. Make sure to open two terminal windows. First, run the web app in the background:

```
npm run start:bi:web
```

Launch the Cypress tests once the web app is running and available at localhost:8000, as shown in figure 11.3.

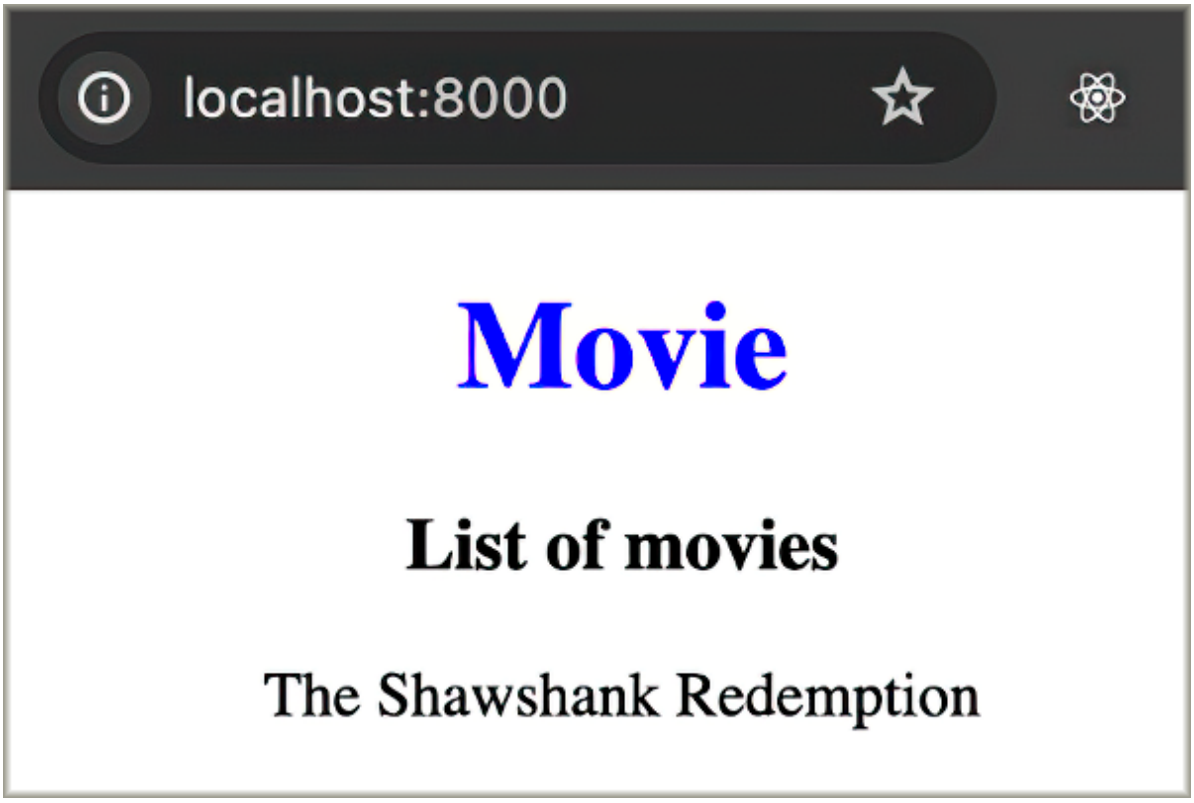


Figure 11.3 Movies web app running locally on port 8000, ready for testing

The movies API is called on this page, returning a list of movies. In this example, “The Shawshank Redemption” is returned from the local API instance. Run the Cypress tests with the mocked movie response, which will return “Finding Nemo”. Run the Cypress `run` script in the second terminal window.

Listing 11.4 Cypress `run` command

```
bi:consumer:cy:run
```