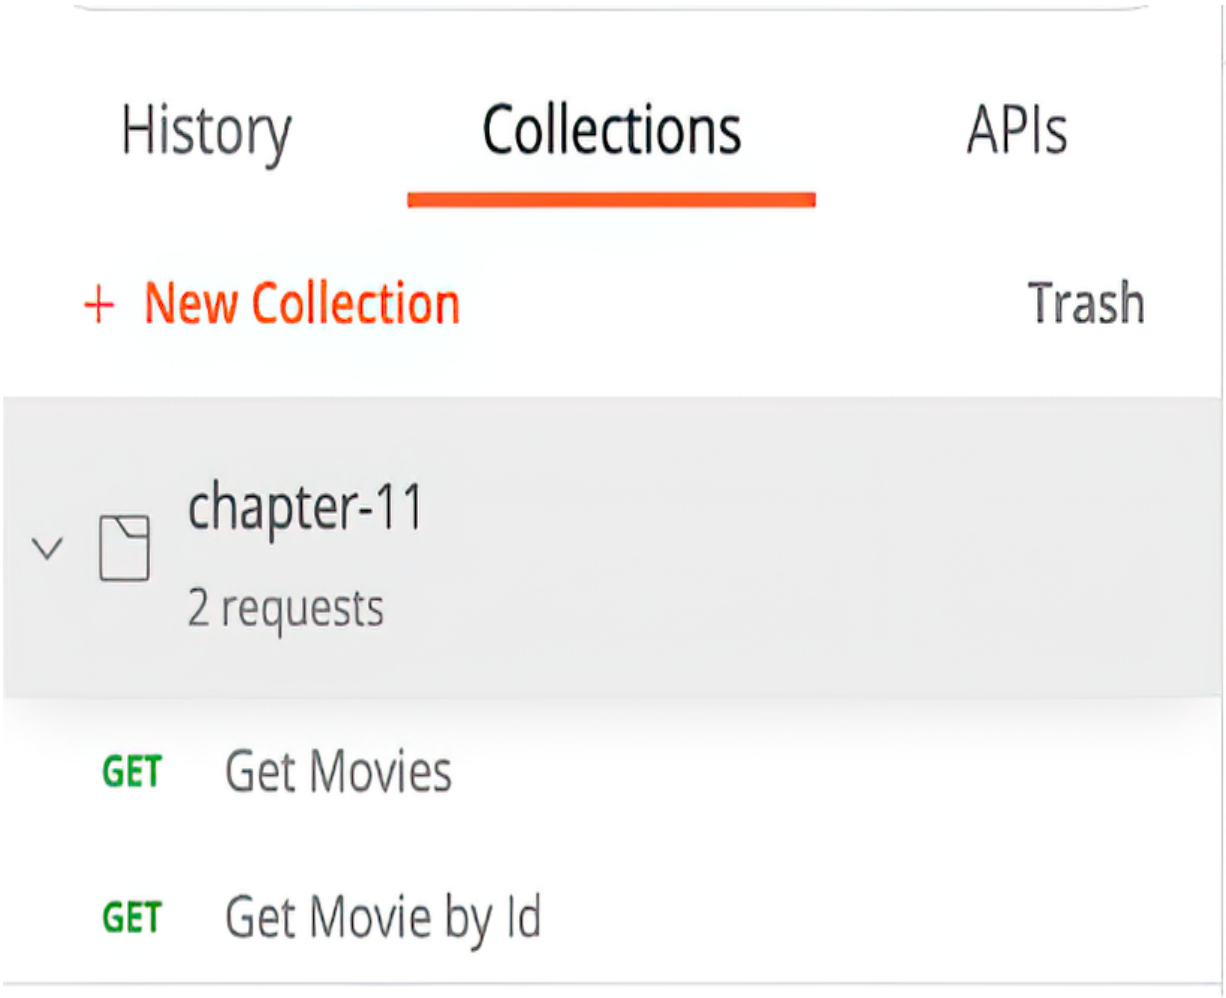


Figure 11.4 Postman collections containing the API requests referenced within the provider OpenAPI specification

Add the exported collection to the provider/postman-tests/ project folder, and run the `newman run` command, as shown in listing 11.14. The script references the exported Postman collection file and defines the report type and report output path. It adds the following script to the package.json file.

Listing 11.14 The `newman run` script

```
"bi:provider:newman":
"newman run ./provider/postman-tests/chapter-11.postman_collection.json
-r cli,json --reporter-json-export ./output/newman-report.json"
```

On completion of running the script on the terminal as

```
npm run bi:provider:newman
```