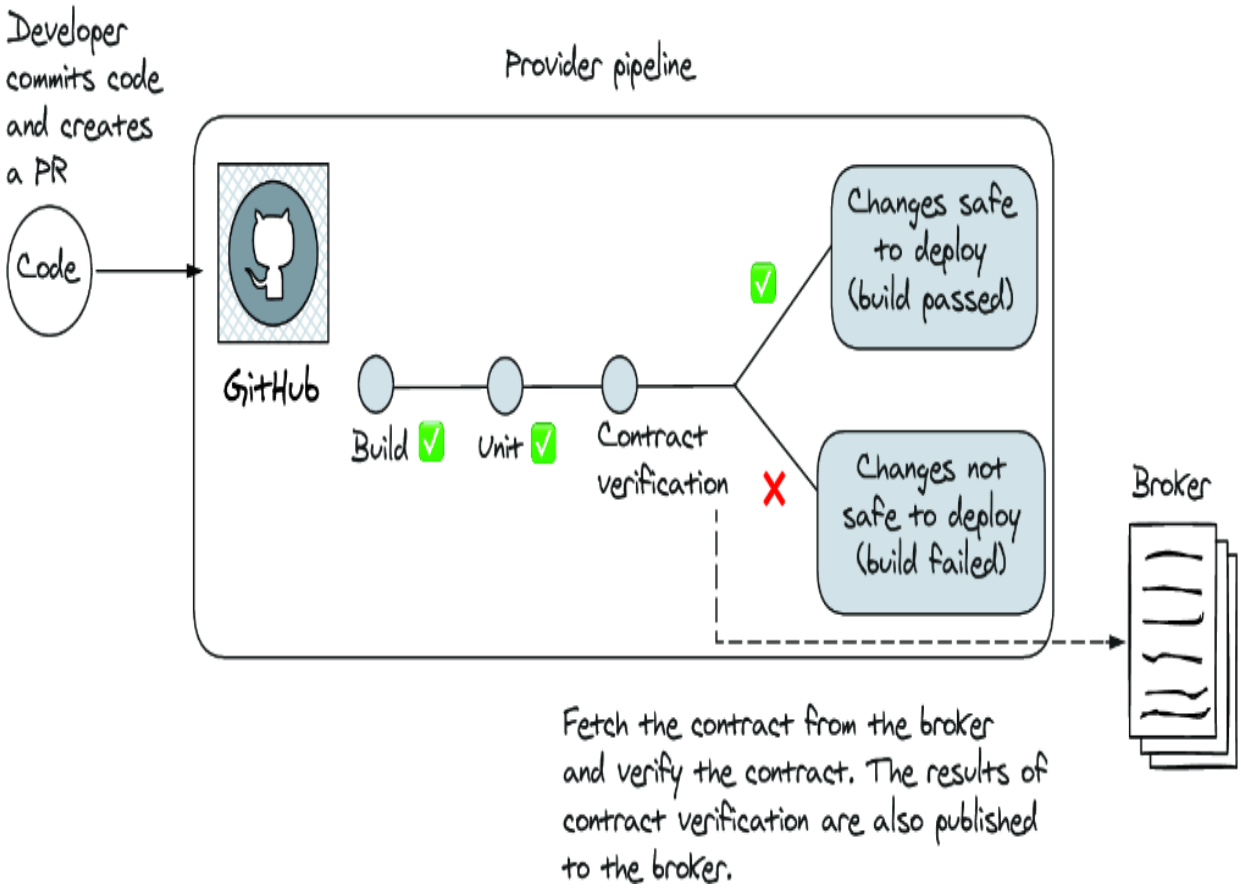


Figure 2.13 A basic provider pipeline workflow

Let's break down again what is happening here:

1. A developer pushes their code and creates a pull request on the provider codebase.
2. The provider contract verification test is triggered automatically. The provider retrieves the contract from a broker, replays the interactions, and verifies if the expected responses match the actual responses they provide.
3. If the provider verification is successful, the results of the verification are published, and the developer working on the provider codebase gets feedback that their changes are safe to be deployed.
4. If the provider verification is unsuccessful, then the test fails, and the changes can't be deployed.
5. The developer fixes the problem, and the steps are repeated again until the provider verification is successful.