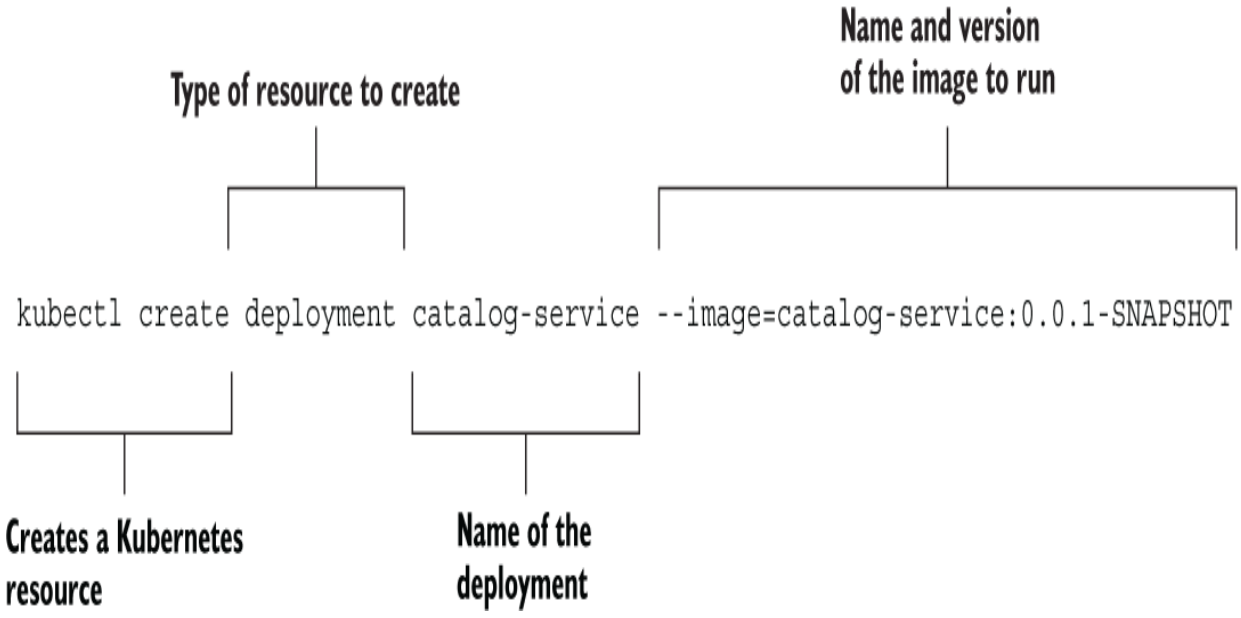


Figure 2.11 The Kubernetes command to create a Deployment from a container image. Kubernetes will take care of creating Pods for the application.

You can verify the creation of the Deployment object as follows:

```
$ kubectl get deployment
NAME              READY   UP-TO-DATE   AVAILABLE   AGE
catalog-service   1/1     1            1           7s
```

Behind the scenes, Kubernetes created a Pod for the application defined in the Deployment resource. You can verify the creation of the Pod object as follows:

```
$ kubectl get pod
NAME                               READY   STATUS    RESTARTS   AGE
catalog-service-5b9c996675-nzbhd   1/1     Running   0          21s
```

TIP You can check the application logs by running `kubectl logs deployment/catalog-service`.