You can then forward the traffic from a local port on your computer (for example, `8000`) to the port exposed by the Service inside the cluster (`8080`). Remember the port mapping in Docker? This works in a similar way. The output of the command will tell you if the port forwarding is configured correctly:

```
$ kubectl port-forward service/catalog-service 8000:8080
Forwarding from 127.0.0.1:8000 -> 8080
Forwarding from [::1]:8000 -> 8080
```

You can refer to figure 2.13 for a description of the command.

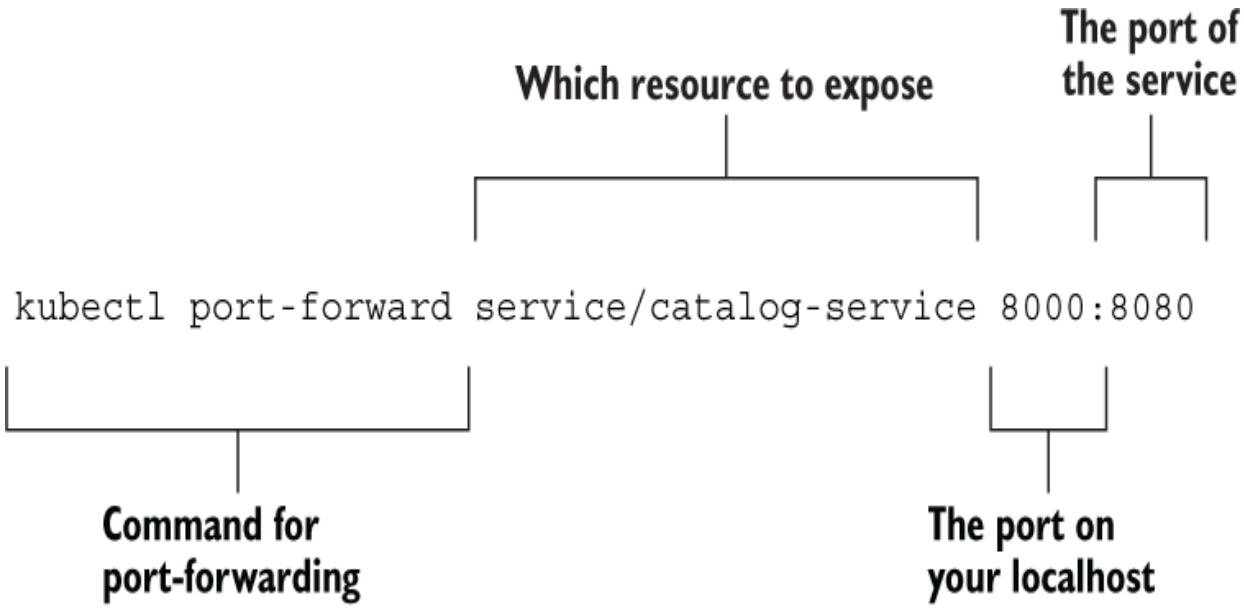


Figure 2.13 The Kubernetes command for forwarding a port from your localhost to a Service inside the cluster. The Catalog Service application will be exposed to your localhost through port 8000.

Now whenever you access port 8000 on your localhost, you will be forwarded to the Service inside the Kubernetes cluster responsible for exposing the Catalog Service application. Open a browser window, navigate