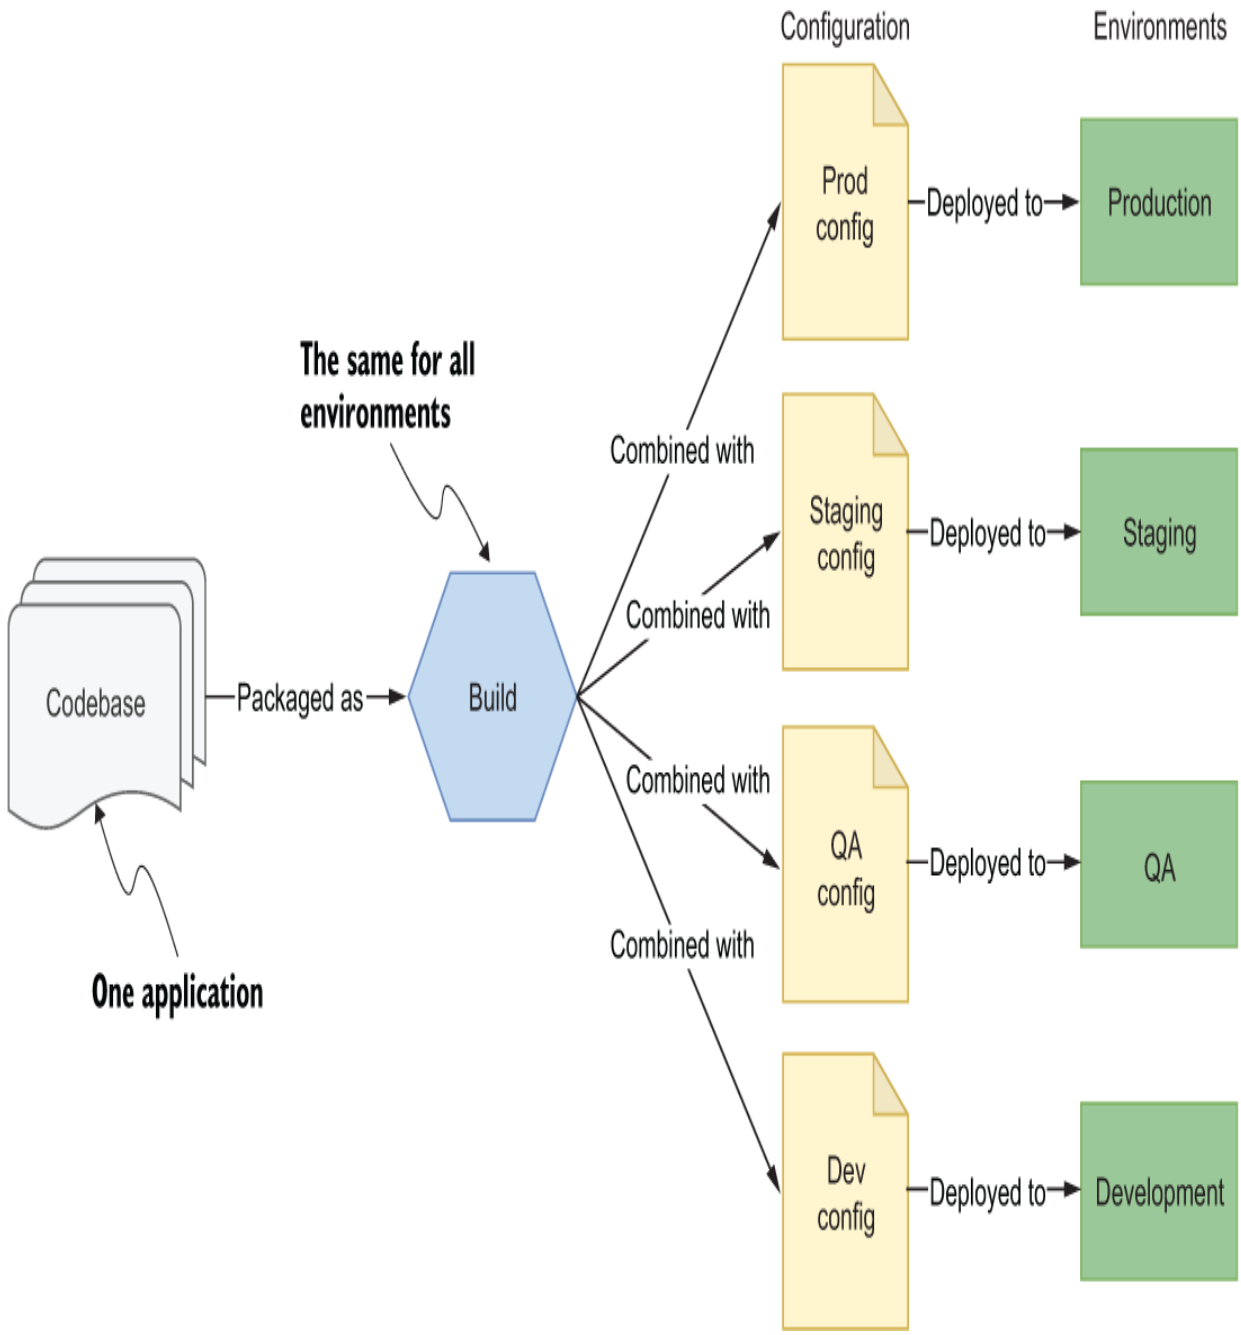


Figure 4.1 Each release you deploy is a combination of build and configuration, which is different for each environment.

Anything that might need to change across deployments should be configurable. For example, you'll probably want to change feature flags, credentials for accessing backing services, resource handles for databases, or