reloading of the configuration data that has changed (*hot reload*). Figure 4.11 shows how it works.

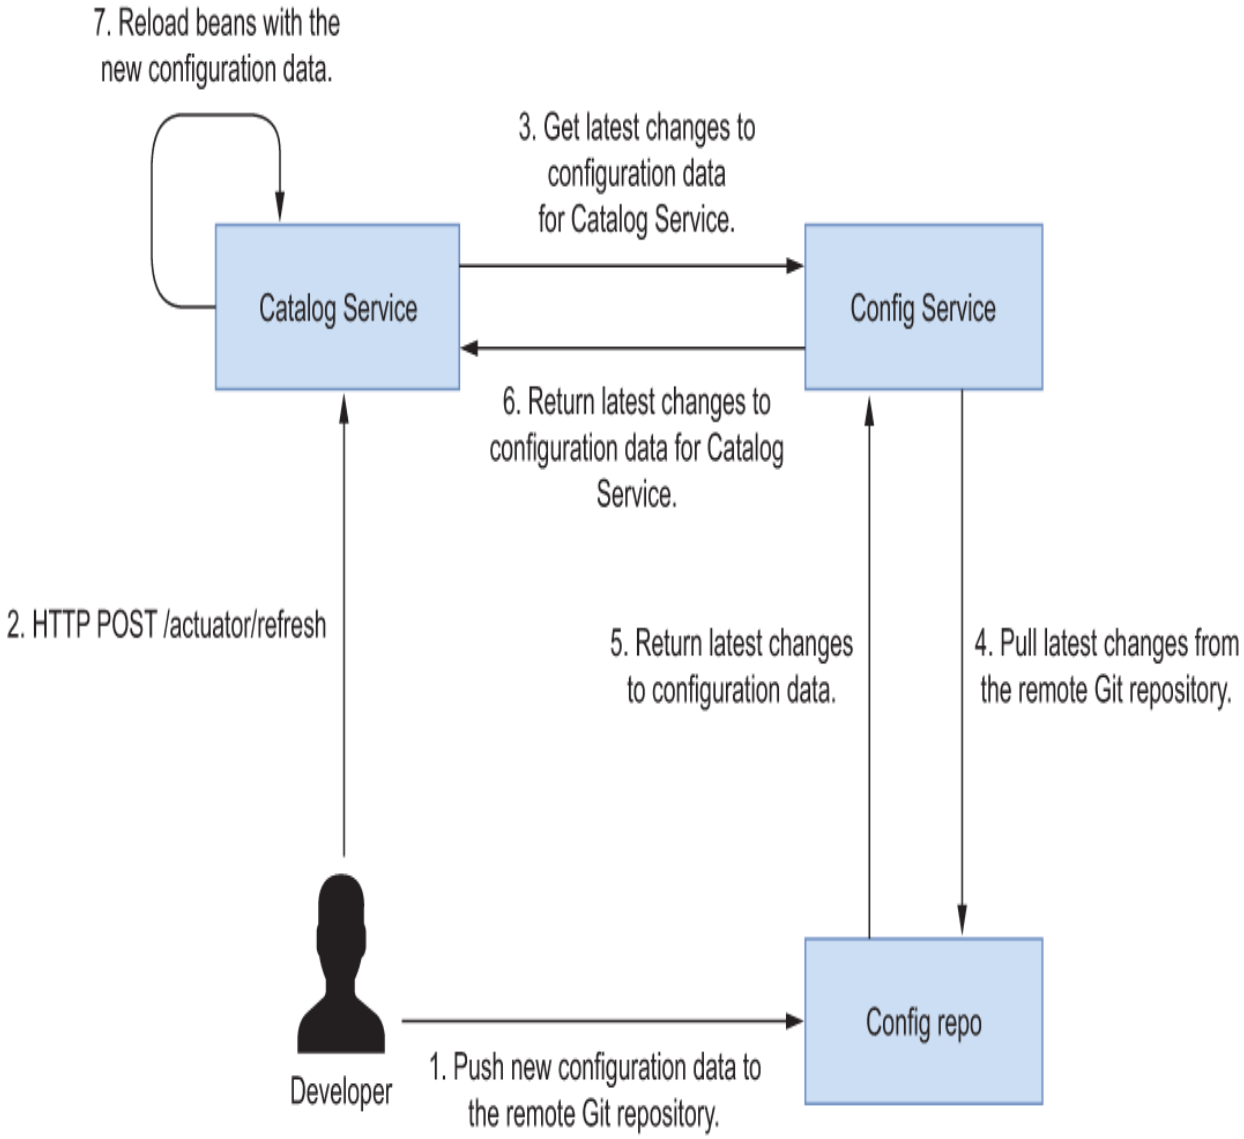


Figure 4.11 After changing the configuration in the Git repository backing the Config Service, a signal is sent to Catalog Service to refresh the parts of the application using the configuration.

This functionality is one of those *administrative processes* described by the 15-Factor methodology introduced in chapter 2. In this case, the strategy