that anymore, since `localhost` would represent the inside of your container and not your local machine. How can you solve this problem?

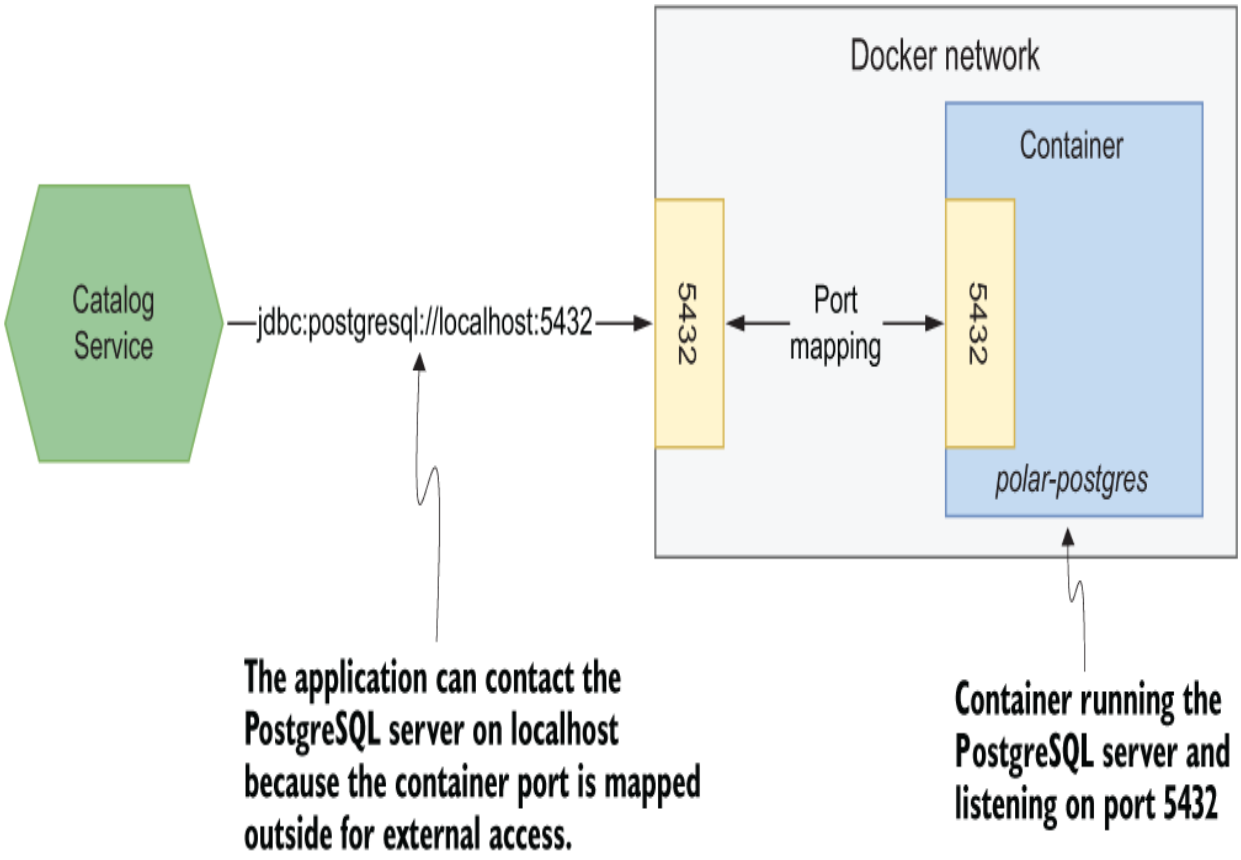


Figure 6.9 The Catalog Service application can interact with the PostgreSQL container thanks to the port mapping, making the database accessible from the outside world.

Docker has a built-in DNS server that can enable containers in the same network to find each other using the container name rather than a hostname or an IP address. For example, Catalog Service will be able to call the PostgreSQL server through the URL `jdbc:postgresql://polar-postgres:5432`, where `polar-postgres` is the container name. Figure 6.10 shows how it works. Later in the chapter you'll see how to achieve this result in code.