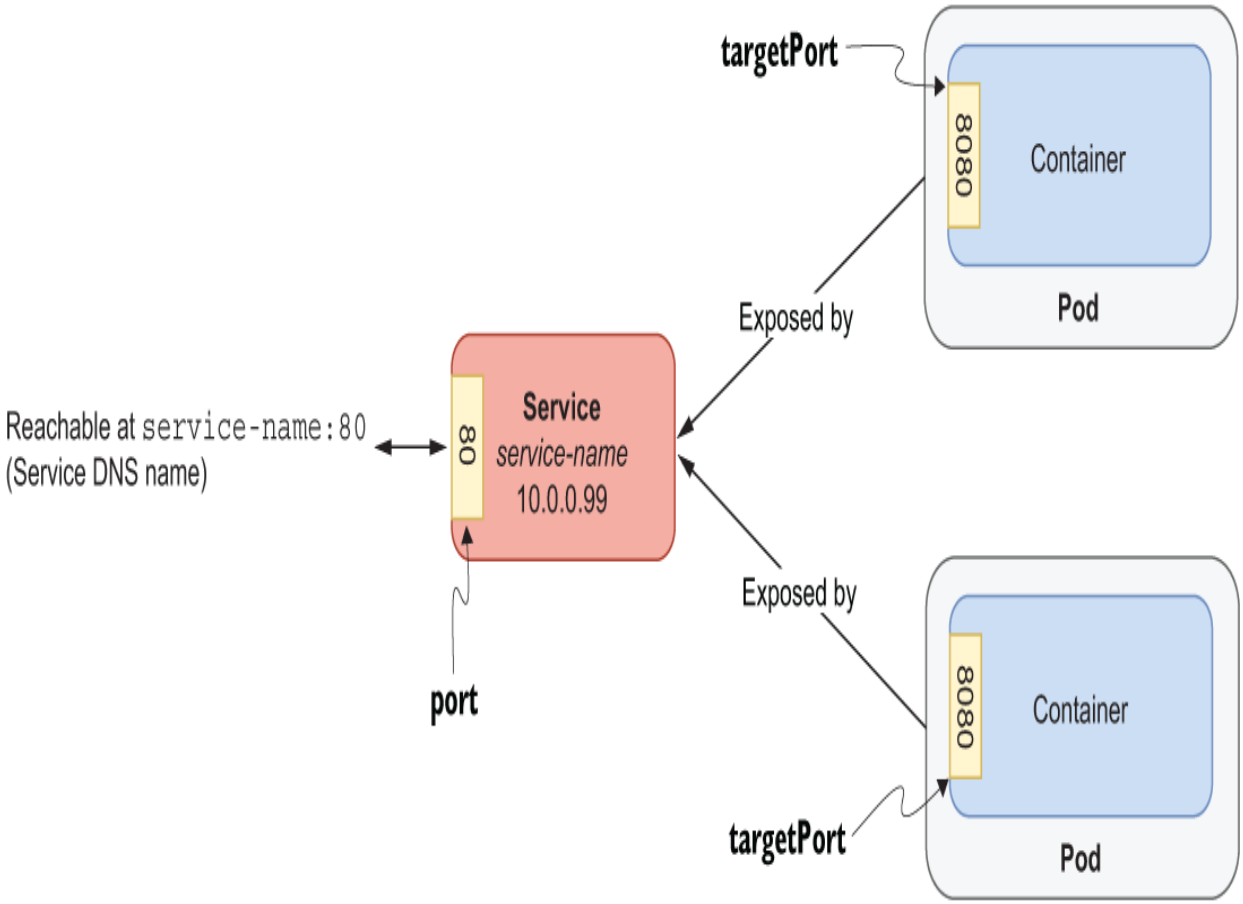


Figure 7.10 A ClusterIP service exposes a set of Pods to the network inside the cluster.

DEFINING A SERVICE MANIFEST WITH YAML

Let's see how we can define a manifest for a Service object to expose the Catalog Service application through the DNS name `catalog-service` and port `80`. Open the catalog-service/k8s folder you created earlier and add a new service.yml file.

Listing 7.3 Service manifest for the Catalog Service application

```
apiVersion: v1                ❶
kind: Service                 ❷
```